


# **KLIXON<sup>®</sup>**

## **Precision Products**

### **Aircraft Circuit Breakers**

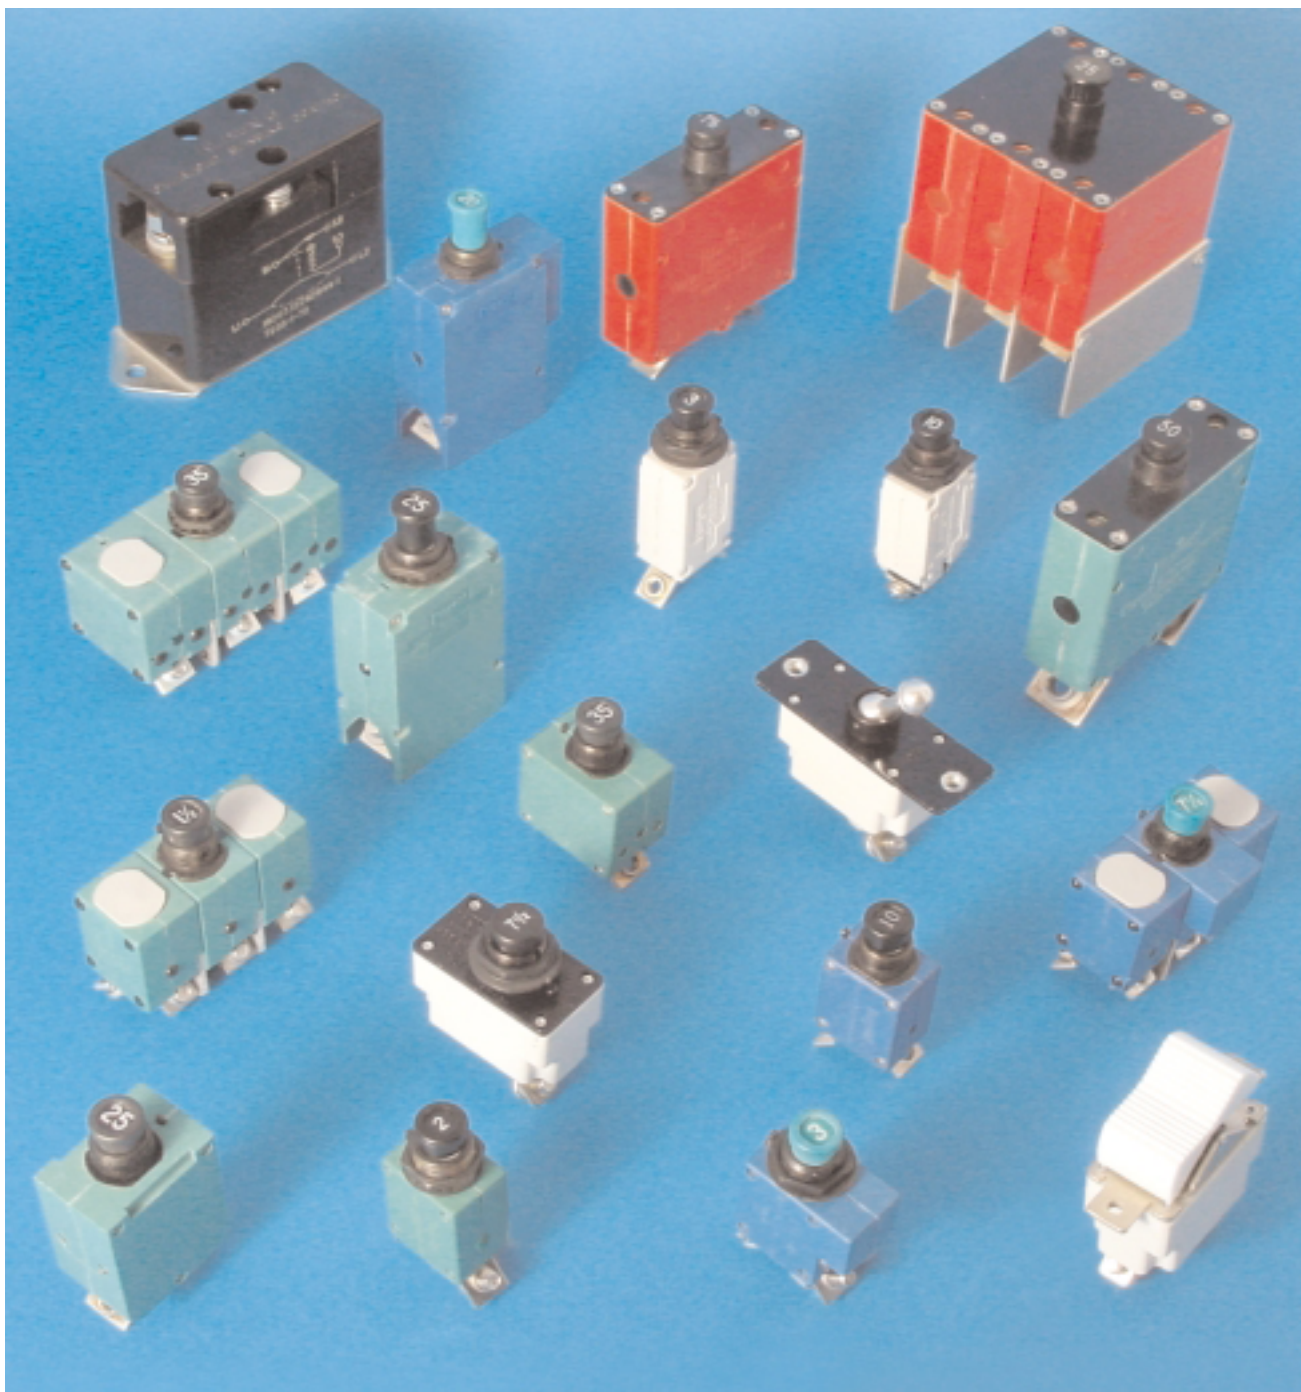

**Sensata**  
Technologies

## Aircraft Circuit Breakers



2TC14



2TC66



3TC14



3TC7



2TC49



5TC50



6752-12



6752-305



6752-100



7277-2



7277-1



20TC



7274-2



7274-4



7274-11 and 7274-69



7270-7



7271-8



7271-3



7270-1



6TC



9TC



3SB2



3SB4

## Overview

Sensata is the leading supplier of circuit breakers to the global aircraft industry and has established the industry standard for quality, reliability, and performance. Sensata has pioneered virtually all of the aircraft circuit breakers styles used in today's aircraft. Sensata's complete line of circuit breakers offers a broad selection of types, features and design options.

- Single pole or three pole versions
- Ratings from ½ to 100 amps
- Trip free design
- Temperature or non-temperature compensated
- Excellent vibration and shock resistance
- Qualified to global commercial and military standards
- Optional auxiliary switch
- Thermal and magnetic sensing
- Push button, toggle or rocker switch
- Long push button
- Various terminal configurations
- MS and commercial configuration
- Manual reset
- 28VDC or 120VAC, 400 Hz

## Applications

Sensata's broad circuit breaker product line is ideal for those rugged applications that require a high level of reliability and performance as well as excellent vibration and shock resistance including:

- Power distribution systems on commercial and military aircraft
- Ground support equipment
- Avionics
- Missile launcher systems
- Aircraft simulators
- Power distribution systems on military vehicles

## Index

| Sensata Number          | Page   |
|-------------------------|--------|
| Guide .....             | 2, 3   |
| 2TC, 3TC .....          | 4, 5   |
| 6TC, 9TC.....           | 6, 7   |
| 2TC49 .....             | 8, 9   |
| 5TC .....               | 10, 11 |
| 6752 .....              | 12, 13 |
| 6752-100 .....          | 14, 15 |
| 3TC7.....               | 16, 17 |
| 7274-2,-4,-11,-69 ..... | 18, 19 |
| 7277 .....              | 20     |
| 20TC .....              | 21     |
| 7270-1, 7271-8 .....    | 22, 23 |
| 3SB2, 3SB4.....         | 24, 25 |
| Arc Fault .....         | 26, 27 |
| Cross Reference .....   | 28     |
| Glossary .....          | 29     |

Sensata maintains a complete line of MS and customer approvals on most major aircrafts worldwide. Due to space limitations, these configurations cannot all be shown.

7276 style aircraft circuit breaker is not shown in the catalog.

**For more information contact our product manager:**

**Tel: (508) 236-3573**

**For more information on circuit breakers**

**contact:Tel: (508) 236-3536**

**Website address: [www.sensata.com](http://www.sensata.com)**



# Condensed Aircraft Circuit Breaker Guide

This guide gives a brief description of most circuit breakers manufactured by Sensata Technologies. For more information, please consult the appropriate section of this catalog.

| CIRCUIT BREAKER TYPE NUMBER     | TYPE      | APPROVAL             | ACTUATING OR RESET MEANS | MANUAL TRIP | INDICATING | RATING IN AMPS                   | MAJOR DIMENSIONS IN INCHES APPROX. L x W x H           | APPROX. WT. IN GRAMS       | APPROX. 200% TIME SECONDS<br>TIME TO TRIP AT TWICE RATED CURRENT |
|---------------------------------|-----------|----------------------|--------------------------|-------------|------------|----------------------------------|--------------------------------------------------------|----------------------------|------------------------------------------------------------------|
| 2TC<br>3TC                      | Aircraft  | MS 3320<br>MS 14105  | Button                   | Yes         | Yes        | 1 - 35<br>15 - 35                | .75 x .56 x 1.2<br>1.10 x .75 x 1.2                    | 25.0<br>36.0               | 10<br>10                                                         |
| 5TC                             | Aircraft  | —                    | Button                   | Yes         | Yes        | 20 - 50                          | 1.65 x .77 x 1.92                                      | 57.5 (std.)<br>59.4 (aux.) | 10                                                               |
| 6TC<br>9TC                      | Aircraft  | MS 14154<br>MS 14153 | Button                   | Yes         | Yes        | 2 - 25<br>1, 15 - 35             | .75 x 1.78 x 1.2<br>1.10 x 2.35 x 1.2                  | 65.0<br>110.0              | 10<br>10                                                         |
| 2TC49                           | Aircraft  | M5809/1              | Button                   | Yes         | Yes        | 2.5 - 15                         | 1.21 x .75 x .56                                       | 25.0                       | 10                                                               |
| 3TC7                            | Aircraft  | MS 25244             | Button                   | Yes         | Yes        | 5 - 35                           | 1.1 x .75 x 1.49                                       | 38.9                       | 35                                                               |
| 6752-12<br>6752-100<br>6752-305 | Aircraft  | MS 24571<br>MS 25361 | Button                   | Yes         | Yes        | 2.5 - 50<br>50 - 100<br>2.5 - 90 | 2.2 x .75 x 3.3<br>2.2 x .75 x 3.3<br>2.2 x 2.25 x 3.3 | 91.0<br>91.0<br>292.0      | 35                                                               |
| 7274                            | Aircraft  | MS 26574<br>MS 22073 | Button                   | Yes         | Yes        | 1/2 - 20                         | .750 x .562 x 2.2                                      | 28.0<br>32.0               | 10                                                               |
| 7277                            | Aircraft  | —                    | Button                   | Yes         | Yes        | 1/2 - 20                         | .750 x .562 x 2.2                                      | 25.0                       | 10                                                               |
| 7270<br>7271                    | Aircraft  | MS 24509<br>MS 24510 | Toggle<br>Button         | Yes         | Yes        | 3 - 35                           | 1.37 x .75 x 2.25<br>1.37 x .75 x 2.00                 | 39.0                       | 50<br>50                                                         |
| 20TC2                           | Aircraft  | —                    | Rocker                   | Yes         | Yes        | 3 - 35                           | 2 x .750 x 2                                           | 39.0                       | 50                                                               |
| 3SB                             | Simulator | —                    | Button                   | Yes         | Yes        | —                                | .750 x .562 x 2.2                                      | 30.0                       | —                                                                |

## MIL Approved Aircraft Circuit Breakers

| MS Number | Sensata Number | Page | MS Number | Sensata Number | Page   | MS Number | Sensata Number | Page   |
|-----------|----------------|------|-----------|----------------|--------|-----------|----------------|--------|
| MS 3320   | 2TC2           | 4, 5 | MS 14154V | 6TC63          | 6, 7   | MS 26574  | 7274-2         | 18, 19 |
| MS 3320L  | 2TC27          | 4, 5 | MS 5809/1 | 2TC49          | 8, 9   | MS 26574A | 7274-4         | 18, 19 |
| MS 3320V  | 2TC63          | 4, 5 | MS 24571  | 6752-12        | 12, 13 | MS 26574L | 7274-70        | 18, 19 |
| MS 14105  | 3TC2           | 4, 5 | MS 24571V | 6752-12        | 12, 13 | MS 24509A | 7270-1         | 22, 23 |
| MS 14105L | 3TC27          | 4, 5 | MS 25361  | 6752-100       | 14, 15 | MS 24509B | 7270-7         | 22, 23 |
| MS 14153  | 9TC2           | 6, 7 | MS 25361V | 6752-102       | 14, 15 | MS 24510A | 7271-8         | 22, 23 |
| MS 14154  | 6TC2           | 6, 7 | MS 22073  | 7274-11        | 18, 19 | MS 24510B | 7271-3         | 22, 23 |
| MS 14154L | 6TC37          | 6, 7 | MS 22073V | 7274-69        | 18, 19 | MS 25244  | 3TC7           | 16, 17 |

\*Note: For cross reference information, refer to page 28.

# Condensed Aircraft Circuit Breaker Guide

| CIRCUIT<br>BREAKER<br>TYPE<br>NUMBER | FAULT<br>INTERRUPTING<br>CAPACITY<br>AMPS @<br>VOLTS<br>& CYCLES                   | REMARKS                                                                   | TYPICAL APPLICATIONS                                                                |
|--------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2TC<br>3TC                           | 6000 @ 28 VDC<br>2500 @ 120 VAC, 400 Hz<br>6000 @ 28 VDC<br>2000 @ 120 VAC, 400 Hz | Subminiature,<br>ambient compensated 1 pole<br>auxiliary switch available | Aircraft power distribution                                                         |
| 5TC                                  | 4000 @ 28 VDC<br>2000 @ 115 VAC, 400 Hz                                            | Ambient compensated                                                       | Aircraft, avionics, and electrical systems                                          |
| 6TC<br>9TC                           | 2000 @ 120 VAC, 400 Hz<br>2000 @ 120 VAC, 400 Hz                                   | Subminiature,<br>ambient compensated, 3 pole                              | Aircraft power distribution                                                         |
| 2TC49                                | 6000 @ 28 VDC<br>2500 @ 120 VAC, 400 Hz                                            | Dual Safety 2TC                                                           | Aircraft power distribution                                                         |
| 3TC7                                 | 6000 @ 30 VDC<br>3500 @ 120 VAC, 400 Hz                                            | Lightweight, high performance,<br>non-ambient temperature<br>compensated  | Aircraft, avionics, and electrical systems                                          |
| 6752-12<br>6752-100<br>6752-305      | 6000 @ 30 VDC<br>120 VAC, 400 Hz                                                   | 1 Pole – 6752-12<br>1 Pole – 6752-100<br>3 Pole – 6752-305                | Aircraft power distribution<br>ground support                                       |
| 7274                                 | 2000 @ 28 VDC<br>500 @ 125 VAC, 400 Hz                                             | Quick acting, subminiature<br>auxiliary switch available                  | Aircraft power distribution,<br>Avionics, ground support, missile systems           |
| 7277                                 | 2000 @ 28 VDC<br>500 @ 120 VAC, 400 Hz                                             | Wide calibration<br>version of 7274                                       | Protection of wire, motors, solenoids,<br>transformers in electronics               |
| 7270<br>7271                         | 4000 @ 30 VDC<br>3500 @ 120 VAC, 400 Hz                                            | Toggle or push button                                                     | Aircraft power distribution                                                         |
| 20TC2                                | 2000 @ 30 VDC<br>1000 @ 120 VAC, 400 Hz                                            | Rocker switch type                                                        | Combination circuit switching & protection<br>light aircraft, electronics, vehicles |
| 3SB                                  | —                                                                                  | Push button                                                               | Commercial and military simulators                                                  |

\*Note: For FAA/PMA approved devices, go to [www.klixon.com](http://www.klixon.com)

**For more information contact our product manager:**

**Tel: (508) 236-3573**

**For more information on circuit breakers contact:**

**Tel: (508) 236-3536**

**Website address: [www.sensata.com](http://www.sensata.com)**



# Single Phase TC Series Circuit Breakers

## Miniature Ambient Compensated

### Features

- Miniature size
- Light weight
- Trip free
- Mil-qualification
- Current rating 1-35 amperes
- Coordinated ratings
- High vibration resistance
- High interrupt capacity



2TC14

2TC66

3TC14

### Overview

Klixon® single-phase TC devices are the smallest, lightest aircraft circuit breakers available today. They represent "state-of-the-art" protection for today's aerospace power systems. Their light weight and small size make them especially well suited for aircraft, avionics and electronic systems.

The Klixon trademark has set the standard for aerospace circuit breakers. Despite the small size, the TC series offers the endurance and reliability required by exacting military specifications, and are available in standard current ratings from 1 – 35 amperes.

### Coordination

The 2, 3, 6 and 9TC breaker ratings are coordinated so any rating will trip before another circuit breaker, twice its rating, in the event of a fault of up to 6000 amps let-thru current. This results in improved overall equipment performance, since only the smallest faulted circuit is interrupted, while larger circuits remain operational (see pages 6 and 7 for 6/9TC details).

### Ambient Temperature Compensation

Ambient compensated circuit breakers permit system designers to specify smaller gauge wire where the circuit breaker and wiring are exposed to different ambient temperatures. They are especially suited for applications where the ambient temperature exceeds the 160°F maximum of non-ambient compensated thermal circuit breakers. The TC series may be applied where operating temperatures are as high as 250°F (121°C), with no derating of the circuit breaker. This eliminates the need for cooling air and allows substantial weight, space and cost savings.

### Options\*

- Longer push buttons
- High vibration
- Random vibration
- Metric mounting thread
- Metric terminal thread
- Dust boot†
- Auxiliary switch - male and female contacts available
- Terminal barriers
- Plug-in terminals

### Trip Free

The complete line of TC series circuit breakers is trip free. The circuit breaker cannot be maintained closed during an overload even with the actuator button held closed.

### High Short Circuit Capacity

For its miniature size, the 2/3TC series offers unusually high current interrupting capacity. Overloads up to 6000 amps at 28 VDC or 2000-3500 amps at 120 VAC, 400 Hz can be safely interrupted without affecting calibration or operating performance in the standard 2/3TC series.

### Qualifications

MS3320 - 2TC2

MS3320L - 2TC27

MS3320V - 2TC63

MS14105 - 3TC2

MS14105L - 3TC27

European standards

SAE standards

All U.S. aircraft OEM's

Most European aircraft OEM's

\* Contact factory for details


† Part Number 14500-1 Fits 15/32 Bushing

Part Number 14500-5 Fits 7/16 Bushing


## Characteristics

## 2TC14 / 3TC14

### 2TC14

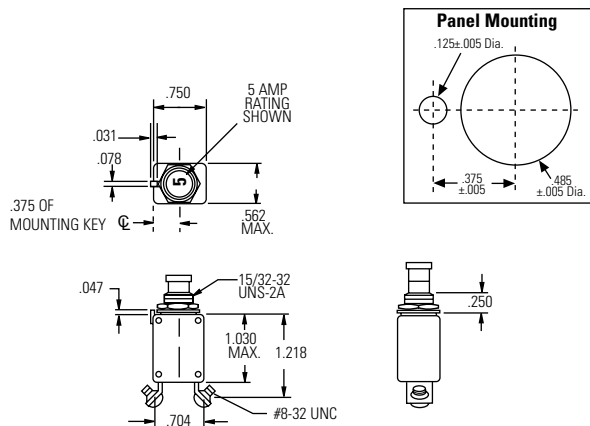

### 3TC14

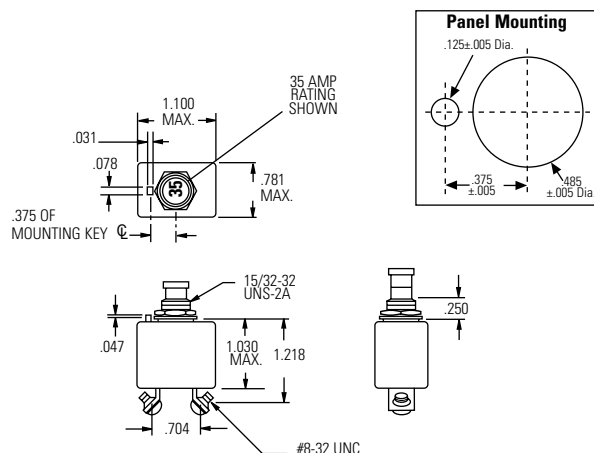

### Calibration: 1-25 amps

| TEMP<br>°C | MIN ULT<br>TRIP | MAX ULT<br>TRIP | TRIP TIME - SECONDS |         |         |
|------------|-----------------|-----------------|---------------------|---------|---------|
|            |                 |                 | 200%                | 500%    | 1000%   |
| +25        | 115%            | 138%            | 4-16                | .4-1.6  | .10-.40 |
| -54        | 115%            | 165%            | 7-35                | .6-3.0  | .15-.70 |
| +121       | 85%             | 145%            | 2-13                | .25-1.0 | .06-.25 |

### Calibration: 15-35 amps

| TEMP<br>°C | MIN ULT<br>TRIP | MAX ULT<br>TRIP | TRIP TIME - SECONDS |         |         |
|------------|-----------------|-----------------|---------------------|---------|---------|
|            |                 |                 | 200%                | 500%    | 1000%   |
| +25        | 115%            | 138%            | 4-20                | .40-1.7 | .10-.40 |
| -54        | 115%            | 165%            | 6-35                | .55-3.0 | .15-.70 |
| +121       | 85%             | 145%            | 2-15                | .25-1.0 | .06-.25 |

Vibration\*..... 10 G's minimum, 50 - 500 Hz  
 Mechanical Shock..... 50 G's  
 Acceleration..... 10 G's  
 Weight..... 2TC14 - 24 gm max.  
 3TC14 - 36 gm max.

### Interrupt Current

1-20 amps: 6000 amps at 28 VDC  
 25 amps: 1625 amps at 28 VDC  
 1-15 amps: 2500 amps at 120 VAC, 400 Hz  
 20 amps: 2000 amps at 120 VAC, 400 Hz  
 25 amps: 1800 amps at 120 VAC, 400 Hz

### Endurance


2500 cycles 120 VAC, 400 Hz Inductive  
 5000 cycles 120 VAC, 400 Hz Resistive  
 2500 cycles 30 VDC Inductive  
 5000 cycles 30 VDC Resistive  
 10,000 cycles Mechanical, no load

\* Other vibration levels available. Contact factory for details.

| Sensata<br>Number | Voltage<br>Drop (max.)** |
|-------------------|--------------------------|
| 2TC14-1           | 1.10                     |
| 2TC14-2           | 0.70                     |
| 2TC14-2½          | 0.50                     |
| 2TC14-3           | 0.40                     |
| 2TC14-4           | 0.45                     |
| 2TC14-5           | 0.35                     |
| 2TC14-7½          | 0.30                     |
| 2TC14-10          | 0.28                     |
| 2TC14-15          | 0.25                     |
| 2TC14-20          | 0.25                     |
| 2TC14-25          | 0.20                     |

| Sensata<br>Number | Voltage<br>Drop (max.)** |
|-------------------|--------------------------|
| 3TC14-15          | 0.25                     |
| 3TC14-20          | 0.25                     |
| 3TC14-25          | 0.25                     |
| 3TC14-30          | 0.25                     |
| 3TC14-35          | 0.25                     |

\*\*Max. voltage drop at nominal rated current.

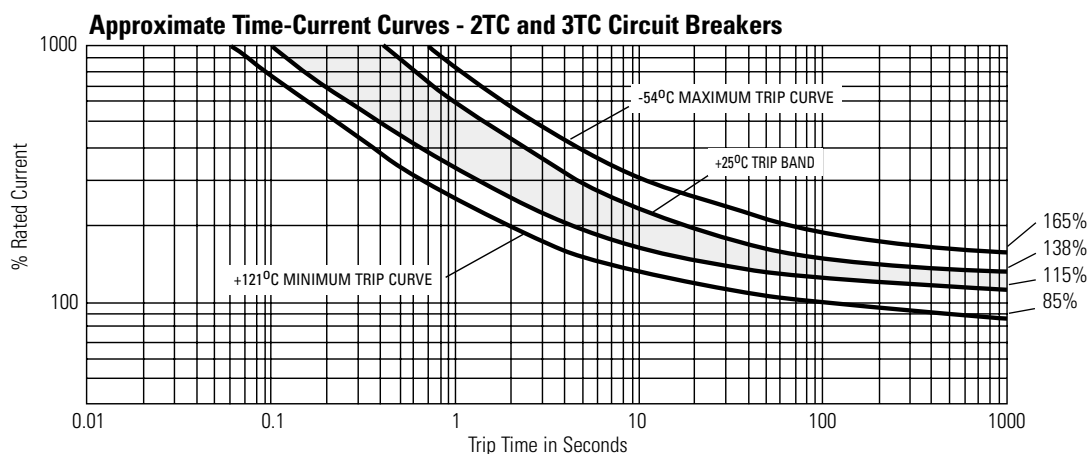



# Three Phase TC Series Circuit Breakers

Miniature Ambient Compensated

## Features

- One phase trips all
- Protective shields between each phase's terminals
- Pads increase mounting stability
- Also includes identical features as 2TC and 3TC



## Overview

The 6TC and 9TC circuit breakers provide ambient compensated circuit protection in a lightweight, subminiature package size. The three phase design integrates each individual phase to provide overcurrent protection in the event of simultaneous or unbalanced overloads, including short circuit conditions.

## Coordination

The 6TC and 9TC are compatible with their single phase 2TC and 3TC cousins. The 6TC and 9TC are available in ratings from 1-35 amps, with military and various commercial approvals on most styles.

## Ambient Temperature Compensation

The 6TC and 9TC are ambient compensated circuit breakers. This allows usage of smaller gauge wire.

The 6TC and 9TC can operate over a temperature range of -54°C to 121°C, however, care should be taken to understand the specification limits at elevated ambient temperatures.

## Options\*

- Longer push buttons
- High vibration
- Metric mounting thread
- Metric terminal thread
- Dust boot†
- Auxiliary switch device available††

\* Contact factory for details

† Part Number 14500-1 fits 15/32 bushing  
Part Number 14500-5 fits 7/16 bushing

†† 6TC Device

## Trip Free

The complete line of TC series circuit breakers is trip free. The circuit breaker cannot be maintained closed during an overload, even with the actuator button held closed.

## High Short Circuit Capacity

For its miniature size, the 6/9TC series offers unusually high current interrupting capacity. Overloads up to 2000 amps at 120 VAC, 400 Hz can be safely interrupted without affecting calibration or operating performance in the standard 6/9TC series.

## Qualifications


|          |       |
|----------|-------|
| MS14154  | 6TC2  |
| MS14154L | 6TC37 |
| MS14154V | 6TC63 |
| MS14153  | 9TC2  |

European standards  
SAE standards  
All U.S. aircraft OEM's  
Most European aircraft OEM's


## Characteristics

6/9TC

### 6TC14

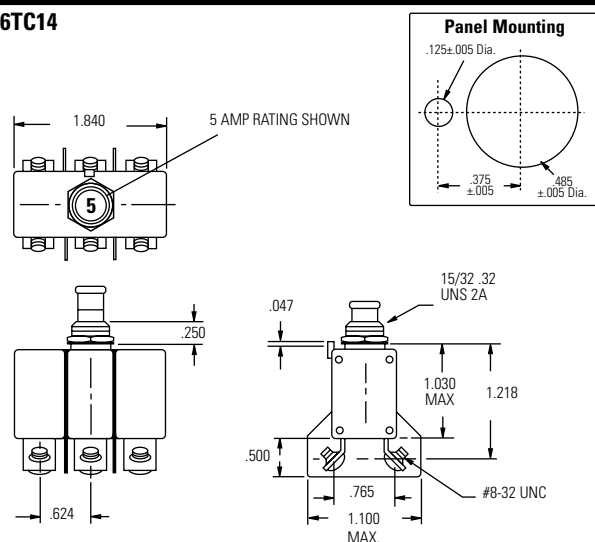

### 9TC14

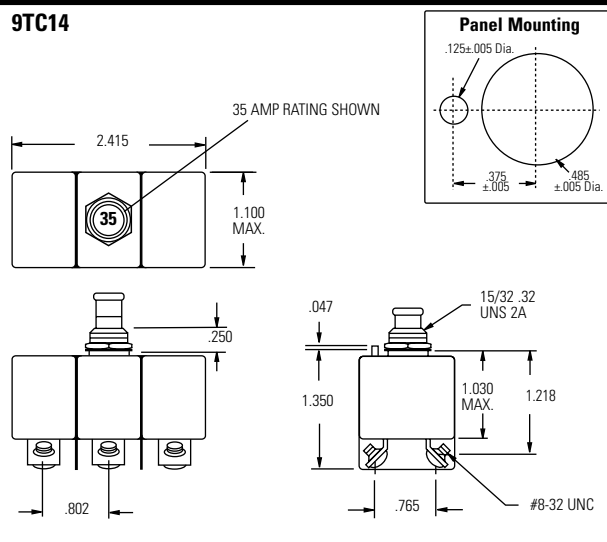

### Calibration: 2-20 amps

| TEMP<br>°C | MIN ULT<br>TRIP | MAX ULT<br>TRIP | TRIP TIME - SECONDS |         |         |
|------------|-----------------|-----------------|---------------------|---------|---------|
|            |                 |                 | 200%                | 500%    | 1000%   |
| +25        | 110%            | 145%            | 4-20                | .40-2.0 | .10-.53 |
| -54        | 110%            | 165%            | 6-40                | .55-3.5 | .15-.80 |
| +90        | 100%            | 145%            | 3-20                | .33-1.7 | .08-.40 |
| +121       | 90%             | 145%            | 3-20                | .33-1.7 | .08-.40 |

† Single phase max. ult. trip values apply with other two phases carrying 100% of rated current.

|                  |                                           |
|------------------|-------------------------------------------|
| Vibration*       | 10 G's minimum, 50-500 Hz                 |
| Mechanical Shock | 50 G's                                    |
| Acceleration     | 10 G's                                    |
| Weight           | 6TC14 - 65 gm max.<br>9TC14 - 110 gm max. |

### Interrupt Current

2-20 amps: 2000 amps at 120 VAC, 400 Hz  
1, 15-35 amps: 2000 amps at 120 VAC, 400 Hz

### Endurance

|             |                           |
|-------------|---------------------------|
| 2500 cycles | 120 VAC, 400 Hz Inductive |
| 5000 cycles | 120 VAC, 400 Hz Resistive |
| 5000 cycles | Mechanical, no load       |

\* Other vibration levels available. Contact factory for details.

### Calibration: 1, 15-35 amps

| TEMP<br>°C | MIN ULT<br>TRIP | MAX ULT<br>TRIP | TRIP TIME - SECONDS |         |         |
|------------|-----------------|-----------------|---------------------|---------|---------|
|            |                 |                 | 200%                | 500%    | 1000%   |
| +25        | 110%            | 145%            | 4-20                | .40-2.0 | .10-.53 |
| -54        | 110%            | 165%            | 6-40                | .55-3.5 | .15-.80 |
| +90        | 100%            | 145%            | 3-20                | .33-1.7 | .08-.40 |
| +121       | 90%             | 145%            | 3-20                | .33-1.7 | .08-.40 |


† Single phase max. ult. trip values apply with other two phases carrying 100% of rated current.

| Sensata Number | Voltage Drop (max.) |
|----------------|---------------------|
| 6TC14-2        | 0.70                |
| 6TC14-2½       | 0.50                |
| 6TC14-3        | 0.40                |
| 6TC14-4        | 0.37                |
| 6TC14-5        | 0.35                |
| 6TC14-7½       | .192                |
| 6TC14-10       | .176                |
| 6TC14-15       | .176                |
| 6TC14-20       | .176                |

| Sensata Number | Voltage Drop (max.)** |
|----------------|-----------------------|
| 9TC14-1        | 1.10                  |
| 9TC14-15       | 0.25                  |
| 9TC14-20       | 0.25                  |
| 9TC14-25       | 0.25                  |
| 9TC14-30       | 0.25                  |
| 9TC14-35       | 0.25                  |

\*\* Max voltage drop at nominal rated current.  
(25 amp 6TC pending qualification.)

### Approximate Time-Current Curves - 6TC and 9TC Circuit Breakers

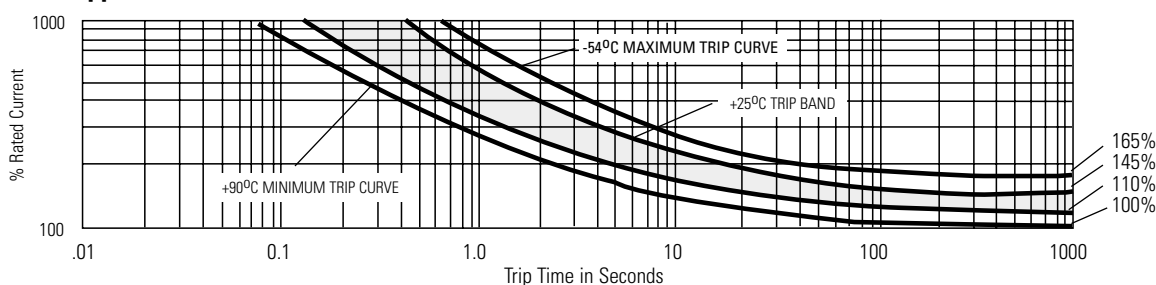



## 2TC49 Series

### "Dual Safety™" Circuit Breakers

---

#### Features

- Extension of 2TC series
- Redundant protection in hard fault catastrophic conditions
- Separable link feature
- Case color distinguishes 2TC49 from 2TC series
- Uses less space and weighs less than other circuit breaker packages
- Rating 2½ -15 amps



2TC49  
"Dual Safety" Circuit Breaker

---

#### Overview

The 2TC49 "Dual Safety™" circuit breaker represents a refinement in electrical control and circuit protection. The 2TC dual safety circuit breaker incorporates a fusible element in a standard 2TC (MS 3320) package size to provide redundant protection in hard fault conditions.

##### "Hard Fault" Tripping

The 2TC dual safety circuit breaker operates identically to a standard circuit breaker under all normal conditions, including

short circuit. In the event of circumstances which disable the internal circuit breaker mechanisms, such that the device is able to carry current but unable to clear an overload via its normal means, the dual safety element acts as a built in fuse to provide redundant circuit protection.

The key part in the dual safety design is a two part current carrying element joined by a special alloy. The geometry and material of the element determine its heating properties. The


elements heating properties are slower than the bimetal sensor but faster than the smoke curve of the wire the rating is designed to protect. In the case where the standard mechanism is disabled or cannot operate normally, the separable element "fuses" open, interrupting the current.

The benefits of the dual safety design result in calibrated overcurrent protection (based on fuse times) and specified post fuse dielectric properties for system and human protection.

## Characteristics

## "Dual Safety™" 2TC49

### 2TC49

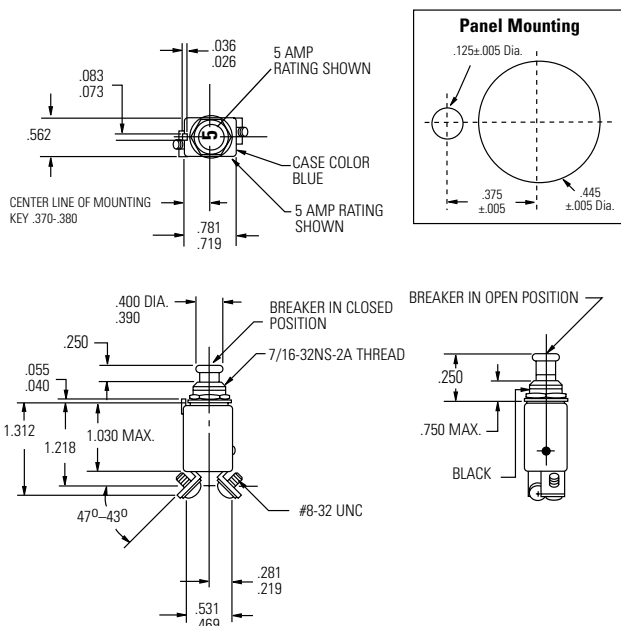

### Link Separation Characteristics

Maximum circuit breaker link separation times for locked contact condition as a function of overload

| Amp Rating | % Overload Rated Current |      |      |      |      |      |       |
|------------|--------------------------|------|------|------|------|------|-------|
|            | 400%                     | 500% | 600% | 700% | 800% | 900% | 1000% |
| 2½         | —                        | —    | 34.0 | 20.0 | 13.0 | 9.0  | 6.0   |
| 3          | —                        | —    | 34.0 | 20.0 | 13.0 | 9.0  | 6.0   |
| 5          | —                        | 95.0 | 36.0 | 18.0 | 10.0 | 6.0  | 3.5   |
| 7½         | 69.0                     | 28.0 | 14.0 | 8.0  | 4.0  | 3.5  | 2.0   |
| 10         | 60.0                     | 35.0 | 20.0 | 12.0 | 7.0  | 4.0  | 2.5   |

Time (seconds)

### Calibration: 2½–15 amps

| Temp °C | Min ULT Trip | Max ULT Trip | Trip Time – Seconds |         |         |
|---------|--------------|--------------|---------------------|---------|---------|
|         |              |              | 200%                | 500%    | 1000%   |
| +25     | 115%         | 138%         | 5-20                | .5-2.0  | .12-.53 |
| -54     | 115%         | 165%         | 7-40                | .6-3.0  | .16-.8  |
| +121    | 90%          | 138%         | 3-13                | .33-1.1 | .07-.3  |

Vibration\* ..... 10 G's minimum, 50-500 Hz  
 Mechanical Shock ..... 50 G's  
 Acceleration ..... 10 G's  
 Weight ..... 2TC49 - 25 gm max.

Post-short circuit dielectric ..... 1125 VAC Min (1mA)  
 Post-link separation dielectric ..... 900 VAC (1mA)

### Interrupt Current

2½ - 15 amps: 6000 amps at 28 VDC  
 2½ amps: 2800 amps at 120 VAC, 400 Hz  
 3 - 15 amps: 2500 amps at 120 VAC, 400 Hz

### Endurance


2500 cycles ..... 120 VAC, 400 Hz Inductive  
 5000 cycles ..... 120 VAC, 400 Hz Resistive  
 2500 cycles ..... 30 VDC, Inductive  
 5000 cycles ..... 30 VDC, Resistive  
 10,000 cycles ..... Mechanical, no load

\* Other vibration levels available. Contact factory for details.

| Sensata Number | Voltage Drop (max.)** |
|----------------|-----------------------|
| 2TC49-2½       | 0.70                  |
| 2TC49-3        | 0.55                  |
| 2TC49-5        | 0.35                  |
| 2TC49-7½       | 0.30                  |
| 2TC49-10       | 0.28                  |

\*\* Max. voltage drop at nominal rated current

### Approximate Time-Current Curves - 2TC49 Circuit Breakers

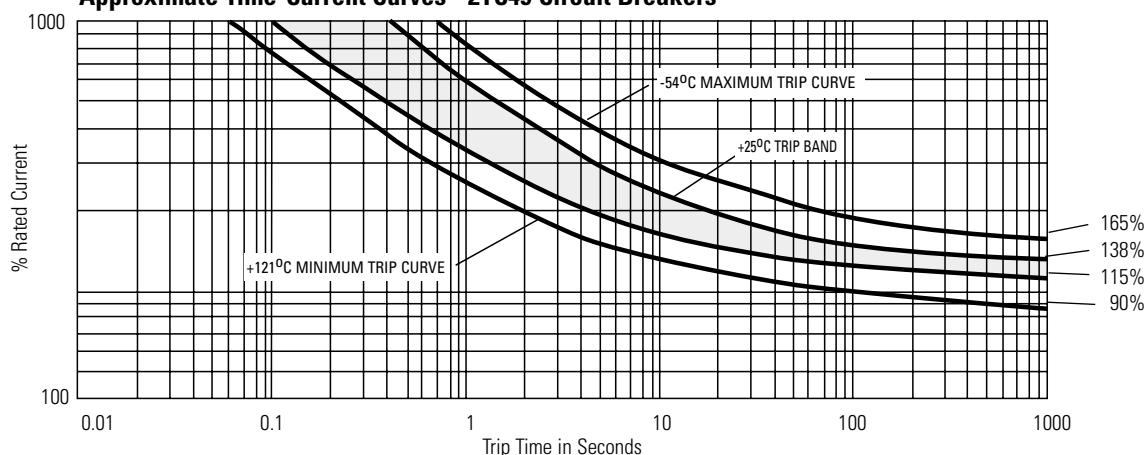

# Klixon®

## 5TC Series

Single Phase, Ambient Compensated

---

### Features

- Trip free
- Current ratings (20 - 50amps)
- Coordinated ratings
- High vibration resistance
- High interrupting capacity



### Overview

Klixon® single-phase TC devices represent “state-of-the-art” protection for today’s aerospace power systems.

The Klixon trademark has set the standard for aerospace circuit breakers. The TC series offers the endurance and reliability required by exacting military specifications and is available in standard current ratings from 20 – 50 amperes.

### Coordination

The single phase 5TC rating is coordinated so it will trip before another circuit breaker, twice its rating, in the event of a fault of

up to 600 amps let through current. This results in improved overall equipment performance, since only the smallest faulted circuit is interrupted, while larger circuits remain operational.

### Ambient Temperature Compensation

The 5TC serves as an ambient compensated circuit breaker. It permits system designers to specify smaller gauge wire where the circuit breaker and wiring are exposed to different ambient temperatures. They are especially suited for application where ambient temperature exceeds the 160°F (71°C) maximum of non-

ambient compensated thermal circuit breakers. The 5TC series may be applied where operating temperatures are as high as 250°F (121°C), with no derating of the circuit breaker. This eliminates the need for cooling air and allows substantial weight, space and cost savings.

### Options


- Longer pushbuttons
- Standard or auxiliary switch configuration
- Terminal barriers

### Qualifications

ASNE0732-005 .....5TC65  
NSA931321 .....5TC50

## Characteristics

5TC

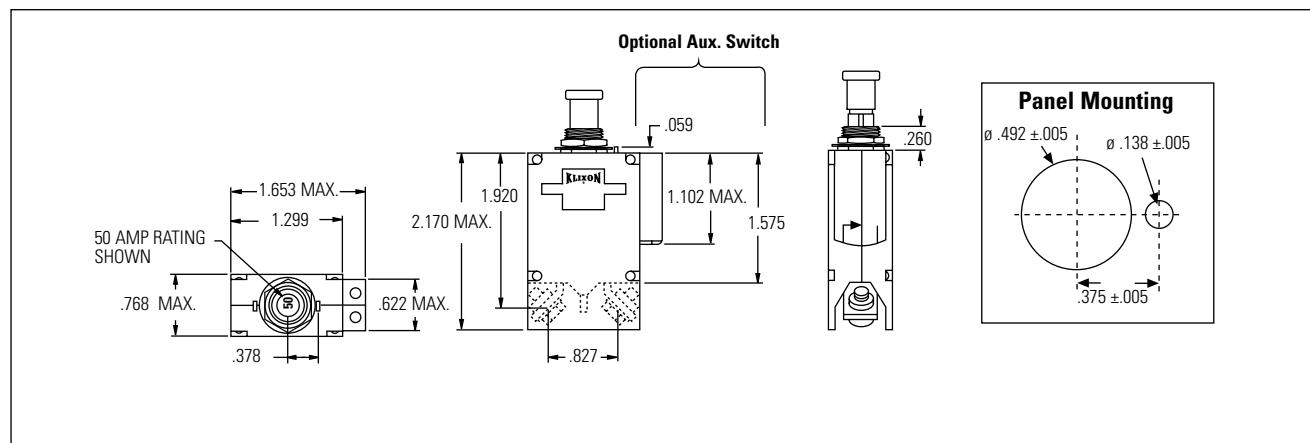

### Calibration: 20-50 Amps

| Temp °C | Min. ULT. Trip | Max. ULT. Trip | Trip Time - Seconds |           |           |
|---------|----------------|----------------|---------------------|-----------|-----------|
|         |                |                | 200%                | 500%      | 1000%     |
| +23     | 110%           | 145%           | 2-18                | .15 - 2.5 | .045 - .6 |
| -54     | 110%           | 165%           | 70 sec. max.        | .15 - 2.5 | .045 - .6 |
| +70     | 105%           | 145%           | 1.5 sec. min.       | .15 - 2.5 | .045 - .6 |
| +125    | 90%            | 145%           | 1.5 sec. min.       | .15 - 2.5 | .045 - .6 |

The above calibration chart is representative of a standard commercial device. Sensata offers specific variants with similar performance dependant on military or customer specifications. Temperatures are  $\pm 5^{\circ}\text{C}$ .

### Interrupting Capacity

20-50 amps.....4000 amps at 28 VDC  
20-50 amps..... 2000 amps at 115 VAC, 400 Hz

### Endurance

2500 cycles.....115 VAC, 400 Hz, Inductive  
2500 cycles.....28 VDC, Inductive  
2500 cycles.....28 VDC, Resistive  
5000 cycles.....Mechanical, no load


### Performance

|                        |                                    |
|------------------------|------------------------------------|
| Vibration .....        | 10 G's minimum, 80-500 Hz          |
| Mechanical Shock ..... | 50 G's                             |
| Acceleration .....     | 10 G's                             |
| Weight                 |                                    |
| Standard Device .....  | 53 grams (w/o hw), 58 grams (w/hw) |
| Auxiliary Device ..... | 55 grams (w/o hw), 59 grams (w/hw) |

| Amp Rating | Voltage Drop (max)* |
|------------|---------------------|
| 20         | 0.150               |
| 25         | 0.150               |
| 35         | 0.150               |
| 50         | 0.120               |

\* Max. voltage drop at nominal rated current

### Approximate Time-Current Curves - 5TC Circuit Breakers

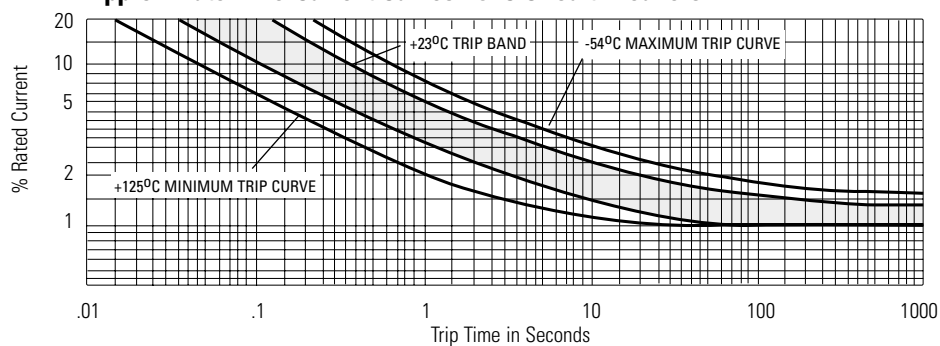




## 6752 Series Circuit Breakers

Ambient Compensated Single & Three Phase High Short Circuit Capacity

### Features

- Useable on large electrical systems – 6000 amperes interrupting capacity
- Circuit protection unaffected by temperature fluctuation – ambient compensated from -65 °F to +250 °F
- Only faulted line circuits opened – coordination of ratings ensures that branch circuit breakers trip first under fault conditions
- Long trouble-free operation – 20,000 operating cycles
- Military approved
- High amp devices available (65A & 90A)

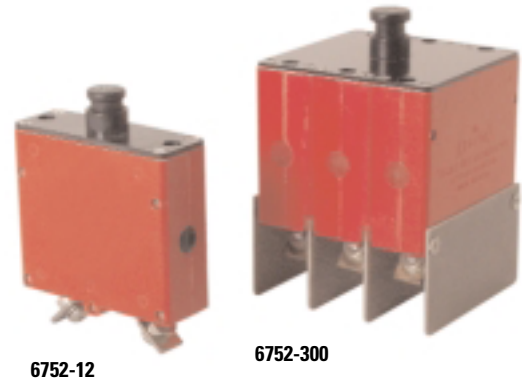

### Overview

The Klixon 6752-12 and -300 series thermal-magnetic circuit breakers are ambient compensated and trip-free. They are designed and manufactured to meet the more stringent military standards of today's jet aircraft, specifically MIL-DTL-22715.

The higher short circuit capacity, vibration resistance and longer cycling life of the 6752-12 and -300 series exceed previous military standards. In addition, the 6752-12 and -300 series provide ambient compensation, fault coordination of all ratings, and an option for auxiliary circuits.

### High Short Circuit Capacity

A deionizing grid and magnetic assist enable the 6752-12 and -300 series to successfully interrupt four fault currents of 6000 amperes – two at sea level and two at 60,000 feet – on either a 120 VAC, 400 Hz system or a 30 VDC system.

### Ambient Temperature Compensation

Substantially unaffected by ambient temperature, the 6752-12 and -300 series circuit breakers maintain their performance capabilities by means of a thermal compensator in the temperature range of -54 °C to +121 °C.

### Coordination

The 6752-12 and -300 series breaker ratings are coordinated so any rating will trip before another rating, twice its capacity, in the event of a fault. This results in improved over-all equipment performance, since only the smallest faulted circuit is removed while larger circuits remain in operation.

### Auxiliary Circuit

The 6752-12 and -300 series are available with auxiliary switch. For part numbers and characteristics, please consult the factory.

### MIL Qualification

| Sensata Number | MS Number   |              |
|----------------|-------------|--------------|
| 6752-12-2½     | MS 24571-2  | MS 24571-2V  |
| 6752-12-5      | MS 24571-5  | MS 24571-5V  |
| 6752-12-7½     | MS 24571-7  | MS 24571-7V  |
| 6752-12-10     | MS 24571-10 | MS 24571-10V |
| 6752-12-15     | MS 24571-15 | MS 24571-15V |
| 6752-12-20     | MS 24571-20 | MS 24571-20V |
| 6752-12-25     | MS 24571-25 | MS 24571-25V |
| 6752-12-35     | MS 24571-35 | MS 24571-35V |
| 6752-12-50     | MS 24571-50 | MS 24571-50V |


When ordering MS 24571-XX(V) style breaker by Sensata part number, designator must include S.R. 12507-356

Example: 6752-12-2½ is S.R. 12507-356


## Characteristics

6752

### 6752-12

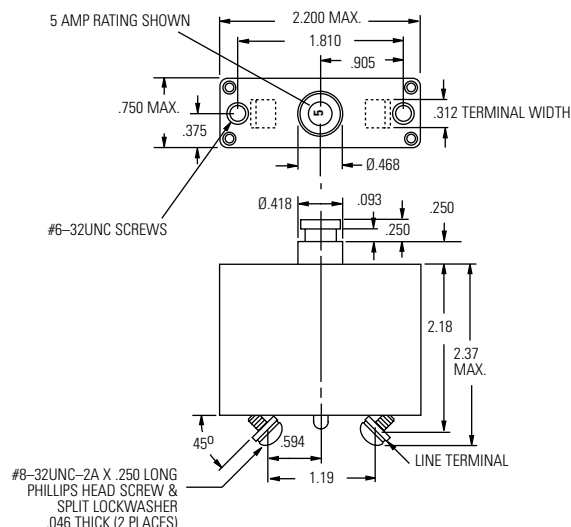

### 6752-305

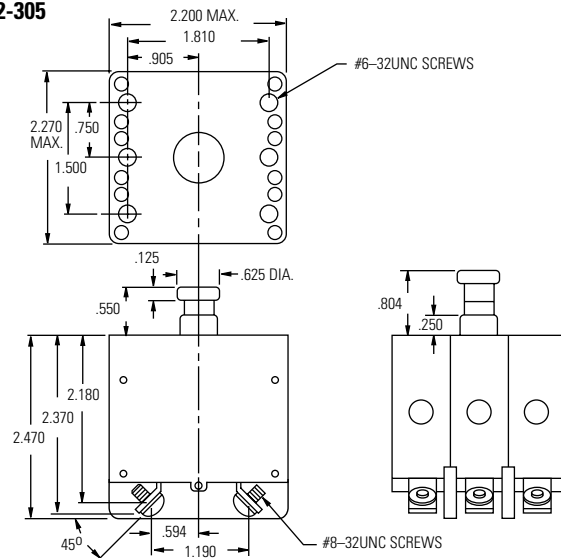

### 6752-12 Calibration: 2½ - 50 amps

| Sensata Number | 200%  | 400%     | 1000%   |
|----------------|-------|----------|---------|
| 6752-12-2½     | 12-32 | 2.3-6.5  | .32-1.1 |
| 6752-12-5      | 14-36 | 2.5-6.5  | .45-1.1 |
| 6752-12-7½     | 16-40 | 2.5-7.0  | .34-1.1 |
| 6752-12-10     | 18-42 | 2.7-7.75 | .45-1.2 |
| 6752-12-15     | 20-45 | 2.7-8.0  | .36-1.2 |
| 6752-12-20     | 20-48 | 2.7-8.0  | .36-1.2 |
| 6752-12-25     | 20-50 | 2.7-8.0  | .36-1.2 |
| 6752-12-35     | 20-53 | 2.7-9.5  | .36-1.2 |
| 6752-12-50     | 20-55 | 2.7-8.0  | .36-1.4 |

### 6752-305 Calibration: 2½ -50 amps

| TEMP °C | MIN ULT TRIP | MAX ULT TRIP | TRIP TIME - SECONDS |        |         |
|---------|--------------|--------------|---------------------|--------|---------|
|         |              |              | 200%                | 400%   | 1000%   |
| +25     | 110%         | 138%         | 12-65               | 2.3-10 | .33-1.4 |
| -54     | 110%         | 160%         | 15-65               | 2.3-10 | .33-1.4 |
| +93     | 105%         | 138%         | 12-65               | 2.3-10 | .33-1.4 |
| +121    | 100%         | 138%         | 12-65               | 2.3-10 | .33-1.4 |

† Single phase max. ult. trip values apply with other two phases carrying 100% of rated current.

| Sensata Number |             | Voltage Drop Max** |
|----------------|-------------|--------------------|
| Single Phase   | Three Phase |                    |
| 6752-12-2½     | 6752-305-2½ | 0.60               |
| 6752-12-5      | 6752-305-5  | 0.40               |
| 6752-12-7½     | 6752-305-7½ | 0.30               |
| 6752-12-10     | 6752-305-10 | 0.25               |
| 6752-12-15     | 6752-305-15 | 0.25               |
| 6752-12-20     | 6752-305-20 | 0.25               |
| 6752-12-25     | 6752-305-25 | 0.25               |
| 6752-12-35     | 6752-305-35 | 0.25               |
| 6752-12-50     | 6752-305-50 | 0.25               |

\*\* Max voltage drop at nominal rated current.

### Performance Characteristics

|                  |                                                |
|------------------|------------------------------------------------|
| Vibration*       | 10 G's minimum, 50-2000 Hz                     |
| Mechanical Shock | 25 G's                                         |
| Acceleration     | 10 G's                                         |
| Weight           | 6752-12 – 91 gm max.<br>6752-305 – 292 gm max. |

### Interrupt Current


2½ - 50 amps: 6000 amps at 30 VDC (6752-12 only)  
 2½ - 50 amps: 6000 amps at 120 VAC, 400 Hz  
 2½ - 50 amps: 4200 amps at 205 VAC, 400 Hz

### Endurance

5000 cycles ..... 120 VAC, 400 Hz Inductive  
 5000 cycles ..... 120 VAC, 400 Hz Resistive  
 10,000 cycles ..... Mechanical, no load  
 20,000 cycles ..... Total

\* Other vibration levels available. Contact factory for details.

### Approximate Time-Current Curves 6752 Circuit Breakers

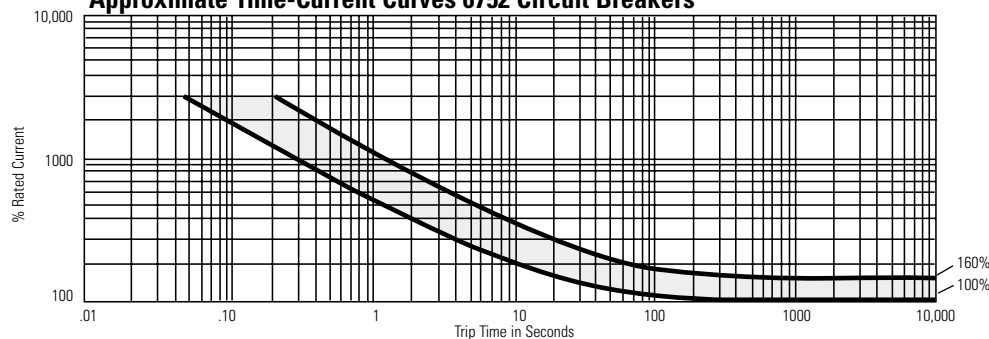



# 6752-100 Series Circuit Breakers

Ambient Compensated Single & Three Phase High, Short Circuit Capacity

## Features

- Current ratings from 50-100 amps
- Proven reliability and performance of the 6752 series circuit breaker
- Usable on large electrical systems – 6000 amperes interrupting capacity
- Circuit protection unaffected by temperature fluctuations – ambient compensated from -40°F to +160°F
- Military approved (including high sine vibration capability) to MS 25361 and MS 25361 (V)



6752-100

## Overview

The Klixon® 6752-100 series thermal-magnetic circuit breakers are ambient compensated and trip-free. These circuit breakers are designed and manufactured to meet stringent military standards with the reliability of the original 6752 design. The 6752-100 is similar to the 6752-12 in size, and includes current ratings ranging from 50-100 amps.

The higher short circuit capacity, vibration resistance and longer cycling life of the 6752-12 and -300 series exceed previous military standards. In addition, the 6752-12 and -300 series provide ambient compensation, fault coordination of all ratings, and an option for auxiliary circuits.

## High Short Circuit Capacity

A deionizing grid and magnetic assist enable the 6752-100 series to successfully interrupt four fault 6000 amp currents, two at sea level and two at 60,000 feet, on either a 120 VAC, 400 Hz system or a 30 VDC system.

## Ambient Temperature Compensation

The 6752-100 series circuit breakers maintains its performance capabilities by means of a thermal compensator in the temperature range of -40°C to +70 °C.

## MIL Qualification

| Sensata Number | MS Number    | Sensata Number | MS Number    |
|----------------|--------------|----------------|--------------|
| 6752-100-50    | MS 25361-50  | 6752-102-50    | MS25361-50V  |
| 6752-100-60    | MS 25361-60  | 6752-102-60    | MS25361-60V  |
| 6752-100-70    | MS 25361-70  | 6752-102-70    | MS25361-70V  |
| 6752-100-75    | MS 25361-75  | 6752-102-75    | MS25361-75V  |
| 6752-100-80    | MS 25361-80  | 6752-102-80    | MS25361-80V  |
| 6752-100-90    | MS 25361-90  | 6752-102-90    | MS25361-90V  |
| 6752-100-100   | MS 25361-100 | 6752-102-100   | MS25361-100V |





## 3TC7 Series

Single Phase, Non Ambient Compensated, High Short Circuit Interrupting Capacity

### Features

- Lightweight
- Miniature size
- High interrupting capacity
- High vibration resistance
- Available in 5-35 amperes



### Overview

The Klixon 3TC7 style circuit breaker is a lightweight, high performance, non ambient temperature compensated circuit breaker that is well suited for aircraft, avionics and electrical systems. The 3TC7 series features a trip free design that prevents the circuit breaker from being closed manually on overloads. The 3TC7 interrupting a 6,000A circuit at 30 VDC, or 3,500A circuit at 120 VAC, 400 Hz.

The Klixon trademark continues to set the standard for lightweight configurations and offers the endurance and reliability required by exacting military specifications. The 3TC7 is currently available in 5-35 amperes.


### Detailed Performance Data

|                              |                                                                                                                         |                                                                              |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| <b>Interrupting Capacity</b> | 6000 Amperes at 30VC                                                                                                    | 3500 Amperes at 120 VAC, 400 Hz                                              |
| <b>Endurance</b>             | 120 VAC, 400 Hz Inductive<br>120 VAC, 400 Hz Resistive<br>30 VDC, Inductive<br>30 VDC, Resistive<br>Mechanical, no load | 2,500 Cycles<br>5,000 Cycles<br>2,500 Cycles<br>5,000 Cycles<br>5,000 Cycles |
| <b>Vibration</b>             | 10 G's                                                                                                                  |                                                                              |
| <b>Mechanical Shock</b>      | 30 G's peak                                                                                                             |                                                                              |
| <b>Acceleration</b>          | 10 G's                                                                                                                  |                                                                              |
| <b>Weight</b>                | 39 gm                                                                                                                   |                                                                              |
| <b>Operating Altitude</b>    | 65,000 ft                                                                                                               |                                                                              |

| Sensata Number | MS Number  | Amp Rating | Voltage Drop |
|----------------|------------|------------|--------------|
| 3TC7-5         | MS25244-5  | 5          | .25          |
| 3TC7-7½        | MS25244-7½ | 7½         | .25          |
| 3TC7-10        | MS25244-10 | 10         | .25          |
| 3TC7-15        | MS25244-15 | 15         | .25          |
| 3TC7-20        | MS25244-20 | 20         | .25          |
| 3TC7-25        | MS25244-25 | 25         | .25          |
| 3TC7-30        | MS25244-30 | 30         | .25          |
| 3TC7-35        | MS25244-35 | 35         | .25          |


## Characteristics

3TC7

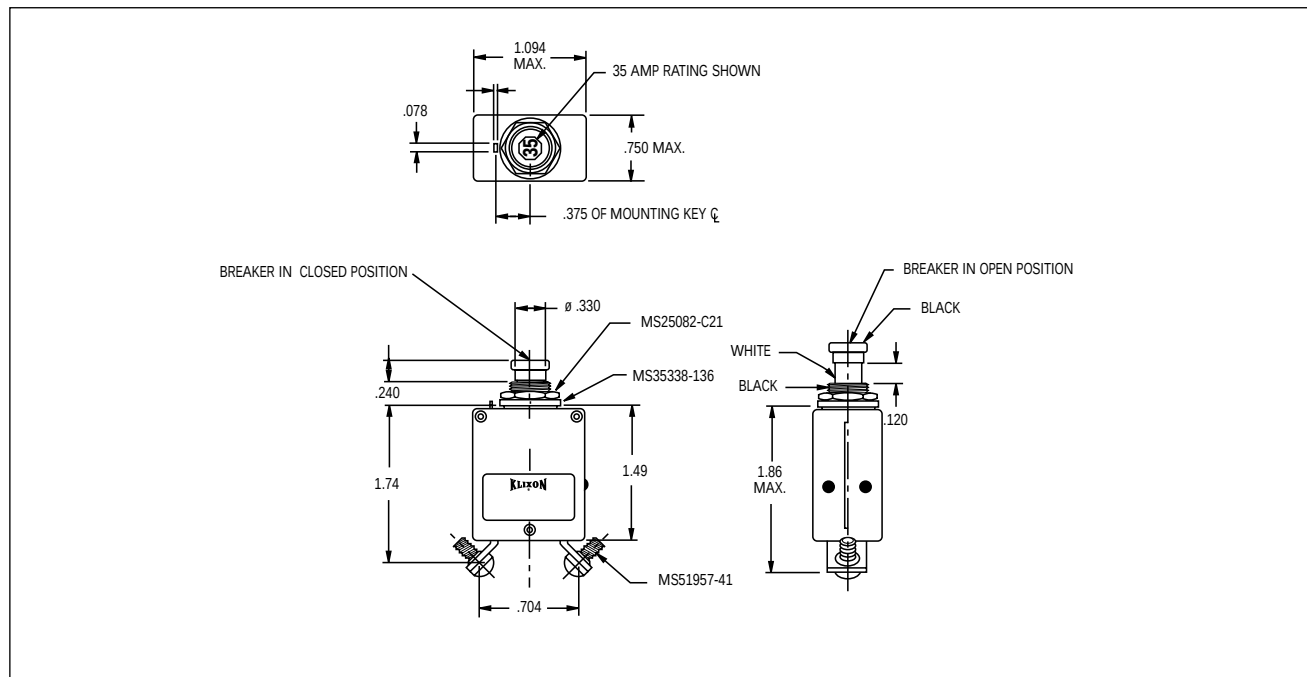

| Calibration | Min Ult Trip | Max Ult Trip | 200%        | 400%          | 600%          |
|-------------|--------------|--------------|-------------|---------------|---------------|
| +25°C       | 115%         | 138%         | 15 - 55 sec | 2.0 - 7.0 sec | 1.0 - 3.5 sec |
| -40°C       | 148%         | 178%         | -           | -             | -             |
| +71°C       | 70%          | 114%         | -           | -             | -             |

**Approximate Time-Current Curve 3TC7 Circuit Breakers**

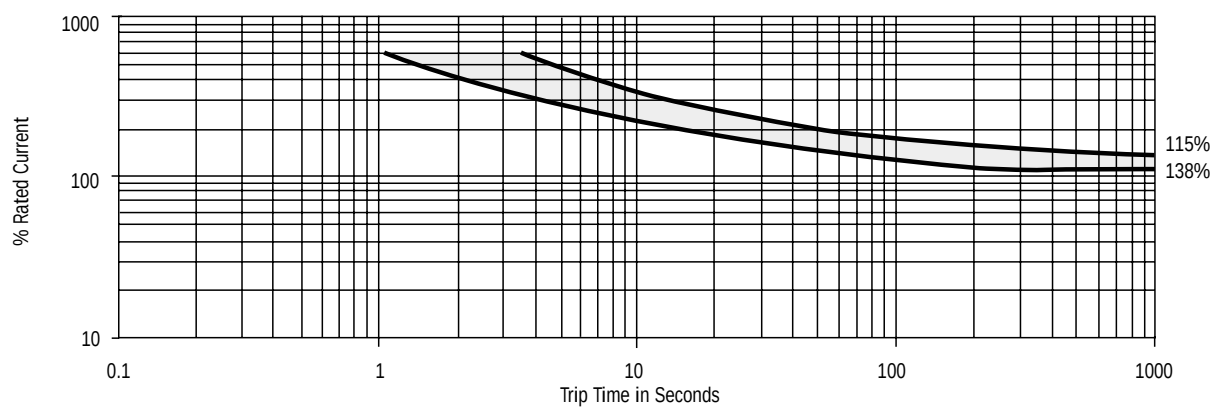



## 7274 Series Circuit Breakers

Low Amperage, High Performance

### Features

- Uses minimum space
- Light weight
- Ratings: 1/2 – 20 amperes
- Military approved



### Overview

The 7274 series are small, light weight, low amperage devices that are specifically designed to protect aircraft / aerospace cable such as flat ribbon, fused multi-conductor tape and printed circuit conductors now being used in lighter weight power distribution systems and components in airborne vehicles and equipment.

The 7274 series features a trip-free indicating-type reset button. Also, a "wiping action" contact design assures low voltage drop, faster trip time and high reliability in low voltage applications. They are available in standard ratings from 1/2 – 20 amps.

A water resistant panel seal\* designed to fit over the push button actuator is available for applications that require this type of protection.

### Options

Long push buttons  
Auxiliary switch  
Waterproof panel seal  
High vibration

| Sensata Number | MS Number   | Sensata Number | MS Number    |
|----------------|-------------|----------------|--------------|
| 7274-2-½       | MS 26574-½  | 7274-4-½       | MS 26574-½A  |
| 7274-2-¾       | MS 26574-¾  | 7274-4-¾       | MS 26574-¾A  |
| 7274-2-1       | MS 26574-1  | 7274-4-1       | MS 26574-1A  |
| 7274-2-1½      | MS 26574-1½ | 7274-4-1½      | MS 26574-1½A |
| 7274-2-2       | MS 26574-2  | 7274-4-2       | MS 26574-2A  |
| 7274-2-2½      | MS 26574-2½ | 7274-4-2½      | MS 26574-2½A |
| 7274-2-3       | MS 26574-3  | 7274-4-3       | MS 26574-3A  |
| 7274-2-4       | MS 26574-4  | 7274-4-4       | MS 26574-4A  |
| 7274-2-5       | MS 26574-5  | 7274-4-5       | MS 26574-5A  |
| 7274-2-7½      | MS 26574-7½ | 7274-4-7½      | MS 26574-7½A |
| 7274-2-10      | MS 26574-10 | 7274-4-10      | MS 26574-10A |
| 7274-2-15      | N/A         | 7274-4-15      | N/A          |
| 7274-2-20      | N/A         | 7274-4-20      | N/A          |
| Sensata Number | MS Number   | Sensata Number | MS Number    |
| 7274-11-½      | MS 22073-½  | 7274-69-½      | MS 22073-½V  |
| 7274-11-¾      | MS 22073-¾  | 7274-69-¾      | MS 22073-¾V  |
| 7274-11-1      | MS 22073-1  | 7274-69-1      | MS 22073-1V  |
| 7274-11-1½     | MS 22073-1½ | 7274-69-1½     | MS 22073-1½V |
| 7274-11-2      | MS 22073-2  | 7274-69-2      | MS 22073-2V  |
| 7274-11-2½     | MS 22073-2½ | 7274-69-2½     | MS 22073-2½V |
| 7274-11-3      | MS 22073-3  | 7274-69-3      | MS 22073-3V  |
| 7274-11-4      | MS 22073-4  | 7274-69-4      | MS 22073-4V  |
| 7274-11-5      | MS 22073-5  | 7274-69-5      | MS 22073-5V  |
| 7274-11-7½     | MS 22073-7½ | 7274-69-7½     | MS 22073-7½V |
| 7274-11-10     | MS 22073-10 | 7274-69-10     | MS 22073-10V |
| 7274-11-15     | N/A         | 7274-69-15     | N/A          |
| 7274-11-20     | N/A         | 7274-69-20     | N/A          |


\* Part number 14500-1 fits 7274-11 and other types with 15/32" mounting bushing.  
14500-5 fits 7274-2 (7/16").

7274-70 Qualified to MS 26547L for ratings 1/2 amp to 10 amp.


## Characteristics

7274

### 7274-2 and 7274-4

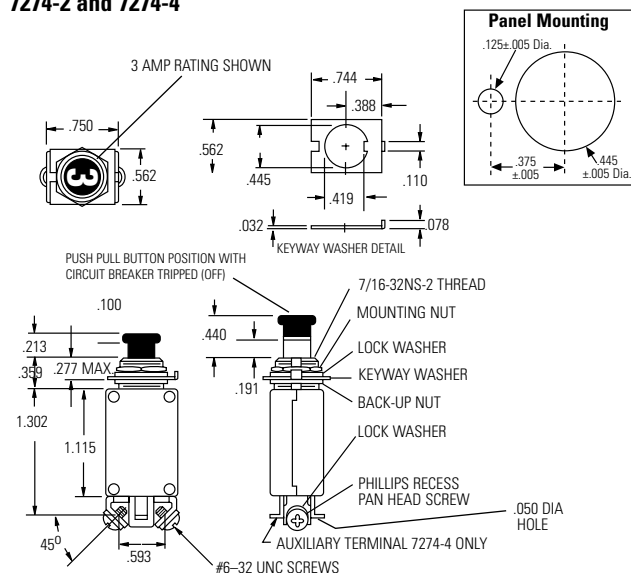

### 7274-11 and 7274-69

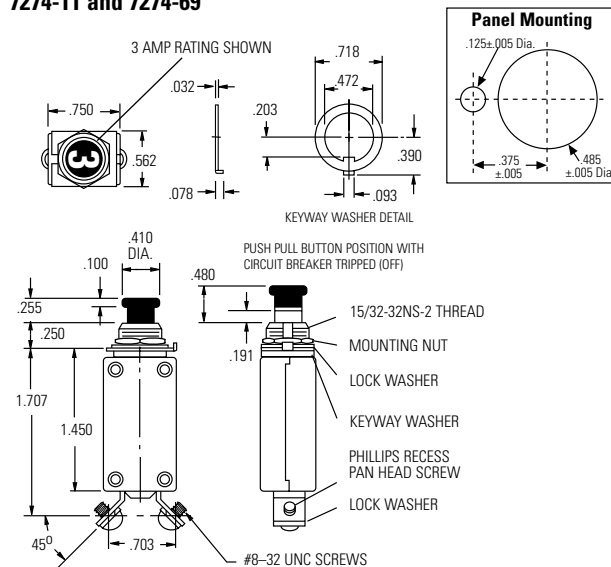

|                  |                                                                                        |
|------------------|----------------------------------------------------------------------------------------|
| Vibration*       | 10 G's minimum, 50-500 Hz                                                              |
| Mechanical Shock | 35 G's                                                                                 |
| Acceleration     | 10 G's minimum                                                                         |
| Weight           | 7274-2: 28 gm max.<br>7274-4: 28 gm max.<br>7274-11: 33 gm max.<br>7274-69: 33 gm max. |

### Interrupt Current

1/2 - 5 amps: unlimited at 28 VDC  
 7½ - 15 amps: 2000 amps at 28 VDC  
 1/2 - 1½ amps: 800 amps at 120 VAC, 400 Hz  
 2 - 5 amps: 800 amps at 120 VAC, 400 Hz  
 7½ - 20 amps: 500 amps at 120 VAC, 400 Hz

### Endurance

|             |                           |
|-------------|---------------------------|
| 2500 cycles | 120 VAC, 400 Hz Inductive |
| 5000 cycles | 120 VAC, 400 Hz Resistive |
| 2500 cycles | 30 VDC, Inductive         |
| 5000 cycles | 30 VDC, Resistive         |
| 5000 cycles | Mechanical, no load       |

\* Other vibration levels available. Contact factory for details.


### Calibration: 1/2-20 amps

| Temp<br>°C | Min ULT<br>Trip | Max ULT<br>Trip | Trip Time - Seconds |         |         |
|------------|-----------------|-----------------|---------------------|---------|---------|
|            |                 |                 | 200%                | 500%    | 1000%   |
| +25        | 115%            | 150%            | 2-20                | .16-1.2 | .046-.8 |
| -55        | 135%            | 180%            | —                   | —       | —       |
| +71        | 90%             | 130%            | —                   | —       | —       |

| Sensata Number | Voltage Drop<br>(Max.)** |
|----------------|--------------------------|
| 7274-XX-½      | 2.00                     |
| 7274-XX-¾      | 1.45                     |
| 7274-XX-1      | 1.10                     |
| 7274-XX-1½     | 0.75                     |
| 7274-XX-2      | 0.75                     |
| 7274-XX-2½     | 0.70                     |
| 7274-XX-3      | 0.55                     |
| 7274-XX-4      | 0.45                     |
| 7274-XX-5      | 0.35                     |
| 7274-XX-7½     | 0.30                     |
| 7274-XX-10     | 0.28                     |
| 7274-XX-15     | 0.25                     |
| 7274-XX-20     | 0.25                     |

\*\*Max voltage drop at nominal rated current.

### Approximate Time-Current Curves 7274 Circuit Breakers

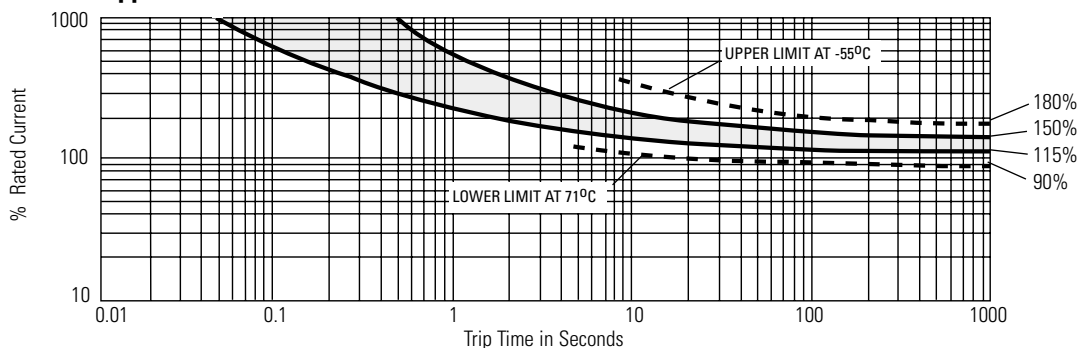



# 7277 Series Circuit Breakers

Low Amperage, General Application

## Features

The 7277 series is designed for applications that do not require the tighter performance characteristics and approvals of our military circuit breakers.

- Small size
- Light weight
- Inexpensive
- Auxiliary switch
- Longer push buttons



## Overview

The 7277 series circuit breaker is physically and electrically identical to the 7274-2 style circuit breaker, with the exception that the 7277 series has wider calibration limits.


Originally developed as an alternative to slow blow fuses, the trip free 7277 is used extensively as primary electrical circuit protection on general aviation aircraft.

The wider calibration limits of the 7277 has also resulted in applications including protection for data processing and telecommunications equipment, computers, flight simulators, construction, material handling and other industrial, electronic equipment.

For use on trainer / simulator applications where all breakers are operated on low ampere control current, different ampere rating inserts (amp ratings on top of push button) can be ordered. Use TI part number 27515.

(Refer to 7274-2 and 7274-4 dimensions on previous page.)

## Code System

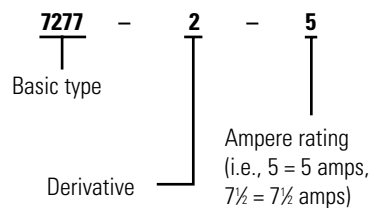

7277 -1: Aux. switch version

## Ordering Information

| Sensata Number | Ampere Rating | Max. Drop** (volts) |
|----------------|---------------|---------------------|
| 7277-2-½       | 1/2           | 2.00                |
| 7277-2-¾       | 3/4           | 1.45                |
| 7277-2-1       | 1             | 1.10                |
| 7277-2-1½      | 1½            | 0.75                |
| 7277-2-2       | 2             | 0.70                |
| 7277-2-2½      | 2½            | 0.50                |
| 7277-2-3       | 3             | 0.33                |
| 7277-2-4       | 4             | 0.30                |
| 7277-2-5       | 5             | 0.25                |
| 7277-2-7½      | 7½            | 0.20                |
| 7277-2-10      | 10            | 0.15                |
| 7277-2-15      | 15            | 0.15                |
| 7277-2-20      | 20            | 0.15                |


\*\*Max voltage drop at nominal rated current.

## Calibration: 1/2–20 amps\*

| Temp °C | Min ULT Trip | Max ULT Trip | Trip Time – Seconds |          |          |
|---------|--------------|--------------|---------------------|----------|----------|
|         |              |              | 200%                | 500%     | 1000%    |
| +25     | 110%         | 150%         | 2-35                | .15-1.70 | .028-.55 |

\* Performance characteristics and dimensions are equivalent to 7274 which are found on page 19.

## Approximate Time-Current Curves 7277 Circuit Breakers

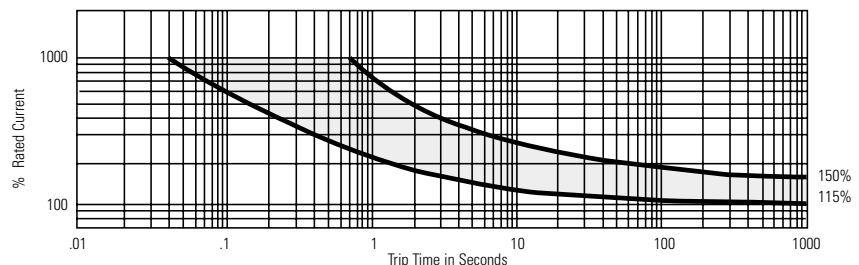

# KLIXON<sup>®</sup>

## 20TC Series Circuit Breakers

### Rocker Actuated Switch Type

#### Features

- Versatile rocker actuator – snap-on, switch type in various styles and colors for panel mounting
- Provides dual function – “ON/OFF” circuit switching and protection



#### Overview

The Klixon 20TC series circuit breaker offers the advantages of integrating an on/off switch and a circuit protector in a trim, compact package. The snap-on actuators are available on request in a variety of colors, styles and indication markings. They are designed to provide a stylish console appearance to the panels of light aircraft, pleasure boats,


home appliances, office reproducing and calculating machines, and data processing equipment.

Several different types of actuators are available. The translucent actuator permits quick identification of the actuator position under low ambient lighting conditions by emitting a soft glow from a light source, such as an edge lighted panel. Colored

actuators will be hot letter stamped in white. White and translucent actuators will be stamped in black.

The growing demand for a highly stylized and aesthetic panel appearance has generated the need for the 20TC. The basic mechanism has been proven for reliability in a wide variety of applications.


#### Envelope Drawings

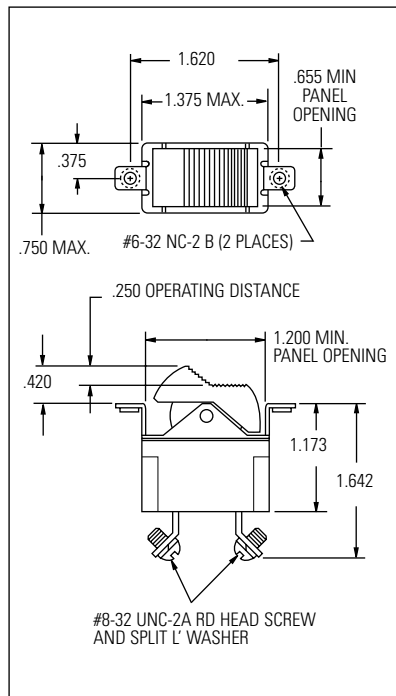

#### Rocker Button Options (SR12507-156-X)

- 1 PUSH ON / LNDG LITE
- 2 PUSH ON / NAV LITE
- 3 PUSH ON / ANTI COLL
- 4 PUSH ON / PITOT HEAT
- 5 PUSH ON / BOOST PUMP
- 6 PUSH ON / GLIDE SLOPE
- 7 PUSH ON MKR BCN
- 8 PUSH ON / STROBE LITE
- 9 OFF
- 10 OFF
- 11 "SR TO INVERT MARKING"
- 13 PUSH ON / ROT BCN
- 16 PUSH ON / ELEV TRIM
- 18 PUSH ON / RADIO MASTER
- 19 PUSH ON / LDG LITE
- 20 ON / OFF
- 21 OFF
- 22 "COLORED BOX"
- 23 OFF
- 25 ON / OFF
- 26 OFF / ON
- 27 PUSH ON / LOW BOOST
- 28 PUSH ON / HIGH BOOST
- 29 PUSH ON / WX RADAR
- 30 PUSH ON / PROP DE ICE
- 33 PUSH ON / STBY VAC
- 34 NO ACTUATOR
- 35 ON / OFF

#### Code System

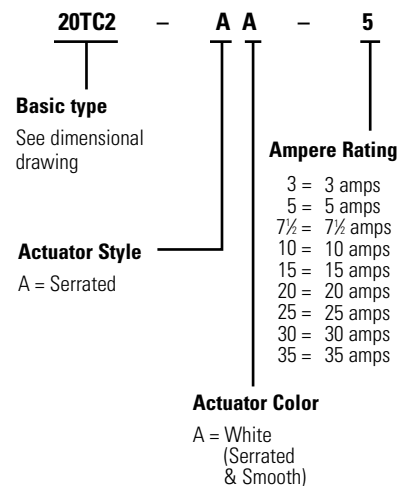

**Note:** Performance Characteristics similar to 7270/7271 devices on page 22 and 23.




# 7270 & 7271 Series Circuit Breakers

## Miniature Aircraft

### Features

- Trip free
- Snap-acting thermal element
- Simplicity of design
- High rupture capacity – 3500 amps, 120 VAC, 400 Hz, 4000 amps, 30VDC
- Light weight
- Small size

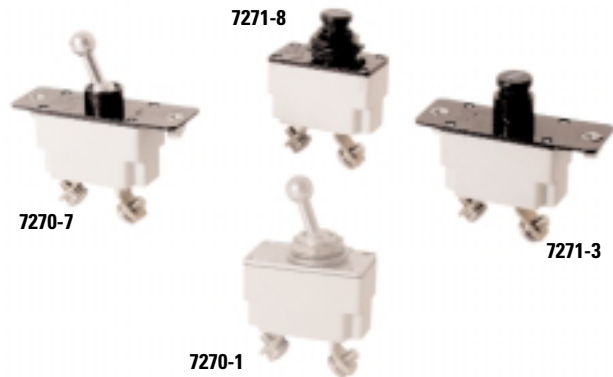


### Overview

The Klixon 7270/7271 series circuit breakers were designed to utilize less space behind the panel space while protecting wire and cable in aircraft and ground support equipment on either 120 VAC, 400 Hz or 30 VDC systems. The units are available with neck mounting (7270-1 and 7271-8) or standard cover plate (7270-7 and 7271-3). In each of these Klixon circuit breakers, the bi-metallic element assures uniform current distribution throughout its responsive area. This design reduces current density at the critical areas, resulting in an element having a much higher interrupting capability than conventional design. Inherently resistant to shock and vibration, the Klixon disc element is capable of precise calibration settings and will retain the initial calibration within close tolerances throughout the service life of the breaker. Both circuit breakers have conventional actuator action; i.e., the toggle actuator on the 7270 moves to the OFF position for trip indication and the button of the 7271 pops out. A standard black button with a white collar is used.

### Qualifications

| Sensata Number | MS Number     | Sensata Number | MS Number     | Sensata Number | MS Number     |
|----------------|---------------|----------------|---------------|----------------|---------------|
| 7270-1-3       | N/A           | 7270-7-10      | MS 24509-B-10 | 7271-3-25      | N/A           |
| 7270-1-5       | MS 24509-A-5  | 7270-7-15      | MS 24509-B-15 | 7271-3-30      | N/A           |
| 7270-1-7½      | MS 24509-A-7½ | 7270-7-20      | N/A           | 7271-3-35      | N/A           |
| 7270-1-10      | MS 24509-A-10 | 7270-7-25      | N/A           | 7271-8-3       | N/A           |
| 7270-1-15      | MS 24509-A-15 | 7270-7-30      | N/A           | 7271-8-5       | MS 24510-A-5  |
| 7270-1-20      | N/A           | 7270-7-35      | N/A           | 7271-8-7½      | MS 24510-A-7½ |
| 7270-1-25      | N/A           | 7271-3-3       | N/A           | 7271-8-10      | MS 24510-A-10 |
| 7270-1-30      | N/A           | 7271-3-5       | MS 24510-B-5  | 7271-8-15      | MS 24510-A-15 |
| 7270-1-35      | N/A           | 7271-3-7½      | MS 24510-B-7½ | 7271-8-20      | N/A           |
| 7270-7-3       | N/A           | 7271-3-10      | MS 24510-B-10 | 7271-8-25      | N/A           |
| 7270-7-5       | MS 24509-B-5  | 7271-3-15      | MS 24510-B-15 | 7271-8-30      | N/A           |
| 7270-7-7½      | MS 24509-B-7½ | 7271-3-20      | N/A           | 7271-8-35      | N/A           |


### Optional Covers

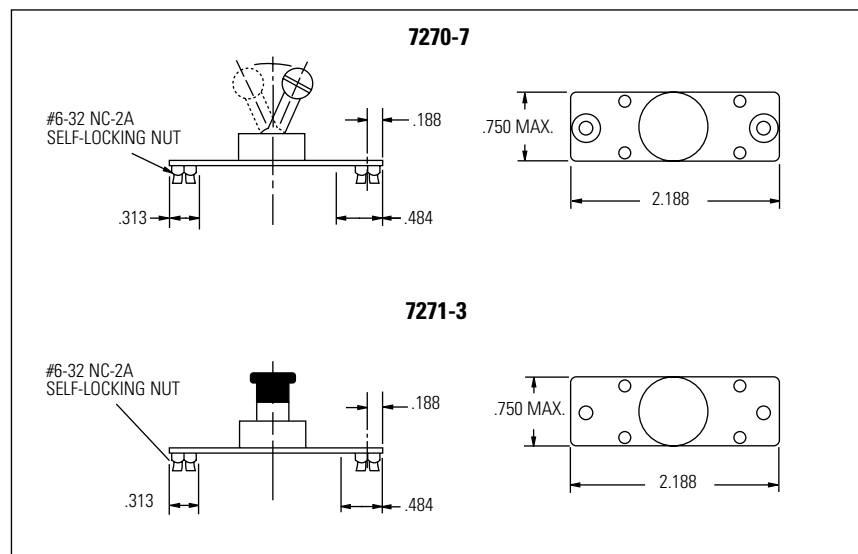


## Characteristics

7270/7271

### 7270-1

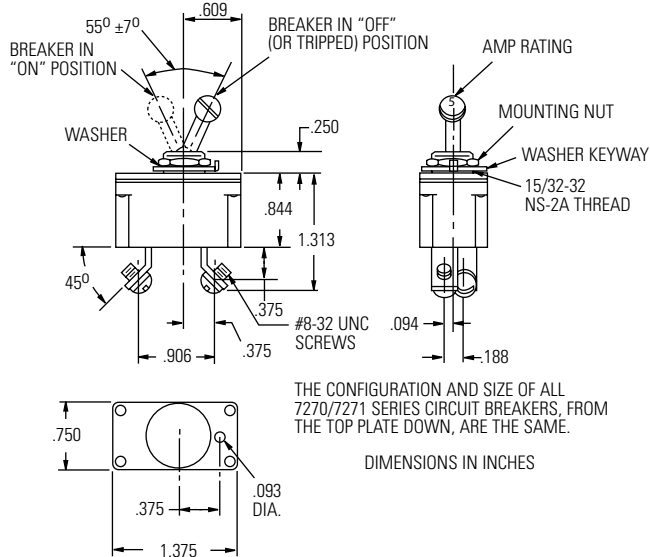

### 7271-8

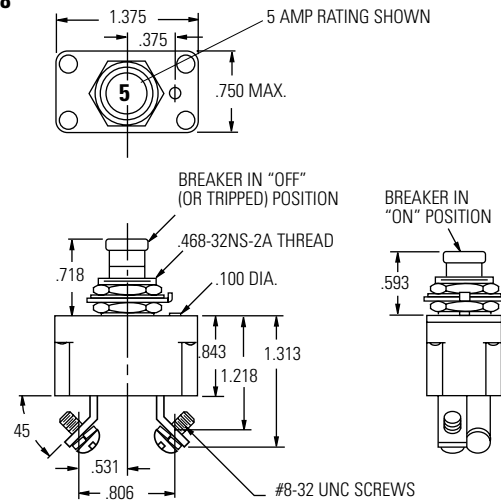

### Calibration: 3-35 amps

| Temp<br>°C | Min ULT<br>Trip | Max ULT<br>Trip | Rating  | Trip Time - Seconds |         |         |
|------------|-----------------|-----------------|---------|---------------------|---------|---------|
|            |                 |                 |         | 200%                | 400%    | 600%    |
| +25        | 115%            | 145%            | 3 amps  | 40-120              | 3-26    | 1-12    |
|            |                 |                 | 5 amps  | 40-100              | 3-22    | 1-10    |
|            |                 |                 | 71/2-35 | 10-70               | .75-7.0 | .25-2.5 |
| -40        | 138%            | 175%            | —       | —                   | —       | —       |
| +71        | 80%             | 125%            | —       | —                   | —       | —       |

Vibration\* ..... 10 G's minimum, 50-500 Hz  
 Mechanical Shock ..... 30 G's  
 Acceleration ..... 10 G's  
 Weight ..... 7270-1 – 39 gm max.  
 7271-8 – 39 gm max.

### Interrupt Current

4000 amps, 30 VDC  
 3500 amps, 120 VAC, 400 Hz


### Endurance

200 cycles ..... 30 VDC Inductive  
 5000 cycles ..... 120 VAC, 400 Hz Inductive  
 5000 cycles ..... 120 VAC, 400 Hz Resistive  
 5000 cycles ..... 30 VAC, 400 Hz Resistive  
 10,000 cycles ..... Mechanical, no load

| Sensata<br>Number<br>7270's | Sensata<br>Number<br>7271's | Voltage Drop<br>(Max.)** |
|-----------------------------|-----------------------------|--------------------------|
| 7270-x-3                    | 7270-x-3                    | 0.75                     |
| 7270-x-5                    | 7270-x-5                    | 0.65                     |
| 7270-x-7½                   | 7270-x-7½                   | 0.5                      |
| 7270-x-10                   | 7270-x-10                   | 0.5                      |
| 7270-x-15                   | 7270-x-15                   | 0.5                      |
| 7270-x-20                   | 7270-x-20                   | 0.5                      |
| 7270-x-25                   | 7270-x-25                   | 0.5                      |
| 7270-x-30                   | 7270-x-30                   | 0.5                      |
| 7270-x-35                   | 7270-x-35                   | 0.5                      |

\*\*Max voltage drop at nominal rated current.

### Approximate Time-Current Curves 7270 and 7271 Circuit Breakers

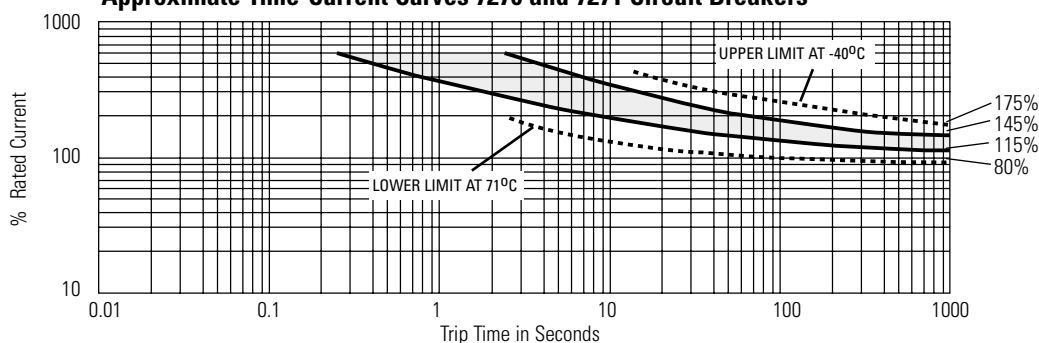

\* Other vibration levels available. Contact factory for details.



# 3SB Series Simulator Circuit Breakers

---

## Features

- Low amperage / fast trip response
- High performance
- Packaged in Military Standard configuration
- Tactile feel equivalent to industry accepted aircraft circuit breakers
- Lower total system cost



---

## Overview

The 3SB Series Simulator Circuit Breaker has been developed by the Precision Products Group of Sensata Technologies to meet the growing needs of the commercial and military simulator industry. With more and more training now being conducted on simulators due to the high operational costs of live training, the realism and complexity of tomorrow's simulators will require a circuit breaker that can provide the same "look and feel" of industry accepted circuit breakers, creating a superior training environment.

3SB electromechanical devices provide fast trip response with low current draw at 28 VDC, and are packaged in a standard

MS26574 style thermal circuit breaker configuration for adaptability to aircraft cockpit panel mounting. This fast trip/low current performance provides the opportunity for system level savings by enabling the designer to potentially down size the system power source. This eliminates expensive I/O boards or other electronics while also reducing the amount of cabling required.

Changes in training schemes normally entail system rewiring to reconfigure the simulator, which becomes labor intensive and costly. With the incorporation of the 3SB device, training changes can easily be achieved through system


software, without the time and cost associated with rewiring. Sensata's simulator circuit breakers also provide the same tactile feel as standard MIL qualified breakers to achieve superior training realism.

Klixon circuit breakers offer the flexibility of ordering replaceable ampere rating inserts. They are attached to the top of the push button actuator, to match the current rating used in the actual aircraft. These inserts can be rotated within the push button to meet your cockpit configuration needs. An optional auxiliary switch for remote indications, along with a variety of connection alternatives, are also available.


## Characteristics

3SB

### 3SB2

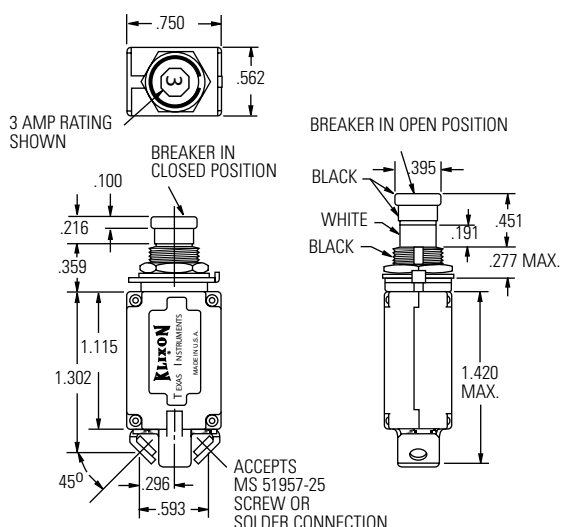

### 3SB4

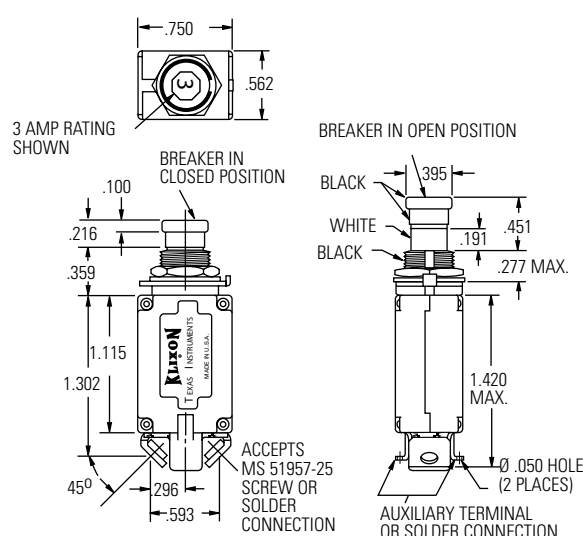

|                          |                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------|
| Open and Reset Force ... | 5 lbs. max.                                                                          |
| Calibration @ 25°C ..... | 200 mA max. current draw @<br>28 VDC, 3 sec. max trip time                           |
| Endurance .....          | 5000 mechanical cycles, no load<br>1000 electrical trip cycles, minimum<br>at 28 VDC |
| Vibration.....           | 5 G's maximum 50-500 Hz                                                              |
| Shock .....              | 5 G's maximum                                                                        |
| Acceleration .....       | 5 G's maximum                                                                        |
| Weight .....             | 30 grams maximum                                                                     |

## Dummy Circuit Breakers


Sensata Technologies has developed a derivative of our 7274 style circuit breaker expressly for applications in simulators, trainers and cockpit mock-ups.

**7274-63D:** Dummy breaker. Non-functional 7274-2 style

**7274-64PS:** Physical sample. 7274-2 style with operational push button. Can measure continuity across terminals.

**7274-65PS:** Physical sample. 7274-11 style with operational push button. Can measure continuity across terminals.

## Part Numbering Code

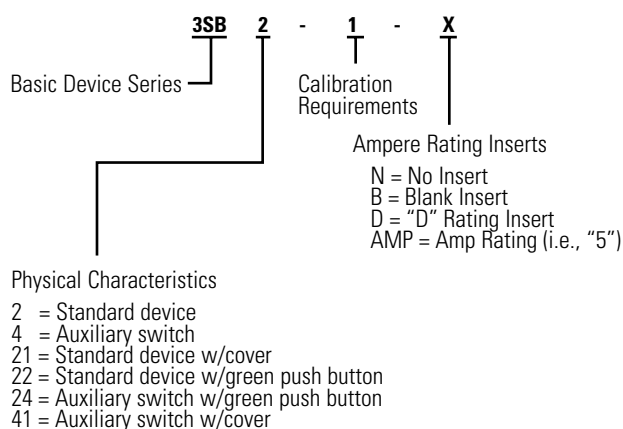



# APD Series Circuit Breakers

## Arc Fault Protection Device

---

### Features

- Small and lightweight
  - Current ratings 1-25 amperes
  - Detects arcs over considerable distances
  - Senses small arc currents in presence of large current loads
  - Insensitive to RFI/EMI and cross talk signals
  - Differentiates between normal load current and arc current
  - Immune to load start up transients
  - Retrofittable – fits into existing panel designs
- 



### Overview

The Arc Fault Circuit Breaker series has been developed by Sensata Technologies to meet the evolving needs of the aerospace industry. Traditional circuit breakers were only designed to detect over-current ( $I^2t$ ) conditions. However, many serious electrical incidents are caused by low level arc fault conditions resulting from damaged or aging wire which present generation circuit breakers are not designed to detect or protect against.

Sensata recognizes the evolving requirements of the aerospace industry and the need for supplemental arc fault protection. Sensata developed a small, lightweight package configuration based around proven Klixon® commercial and mil-spec circuit breaker designs, integrating the traditional over-current trip features of today's circuit breakers with new supplemental arc fault detection and protection features. shut down for motor, fan, strobe light, or fluorescent light.

The two arc fault catalog pages represent the first generation of

arc fault circuit breakers that will be used in the commercial aerospace market. The first generation design is based upon the industry need to support 120VAC, 400 Hz aircraft applications.

Future design considerations for the arc fault circuit breakers under development by Sensata comprehend and include:

- Arc fault trip indication
- 28VDC
- Operating temperature range expansion
- Single phase 30–100A
- Three–phase development
- Ground fault detection
- Variable voltage and frequency options

#### Ambient Temperature Compensation

The arc fault series of circuit breakers are based on the design of our existing ambient compensated circuit breakers product family permitting system designers to specify smaller gauge wire where the circuit breaker and wiring are exposed to different ambient temperatures. The arc fault

circuit breakers can operate over a temperature range of -54°C to 71°C however, care should be taken to understand the specification limits at elevated ambient temperatures.

#### Trip Free

The complete line of arc fault series circuit breakers is trip free. The circuit breaker cannot be maintained closed during an overload, even when the actuator is held closed.

#### High Short Circuit Capacity


The arc fault series of circuit breakers offers unusually high short circuit current interrupting capacity. Depending on the device, overloads of up to 3500 amps at 120VAC, 400 Hz can be safely interrupted.

#### Options

Longer push buttons  
High vibration  
Random vibration capability  
U.S. terminals (offset/inline)  
Metric mounting threads

## Characteristics

## Arc Fault

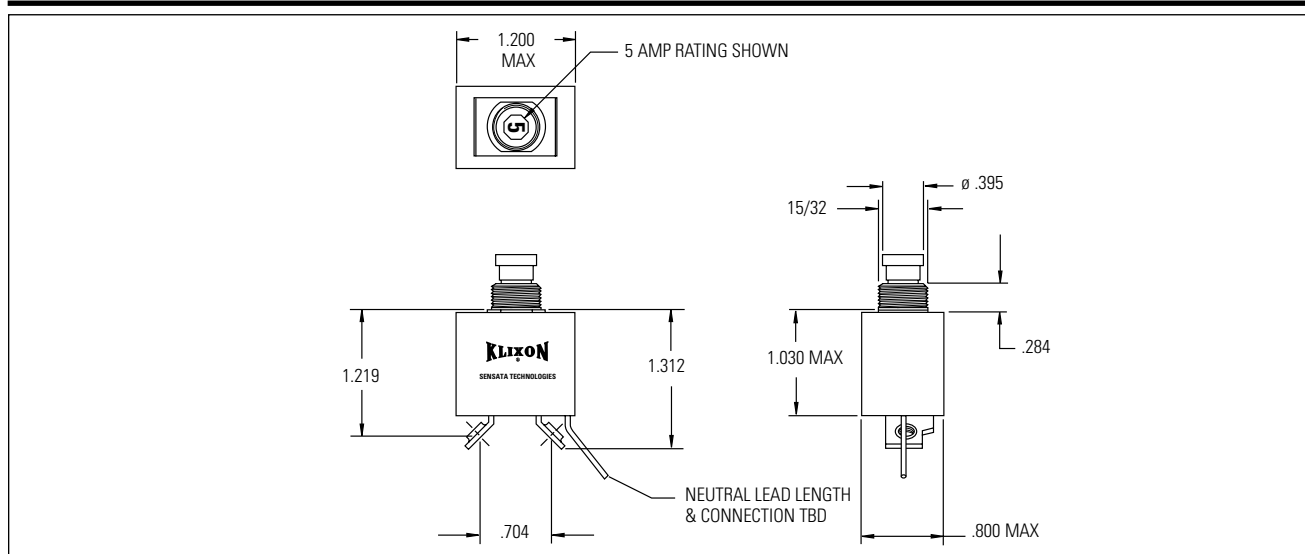

### Calibration: 1-25 amps

| TEMP<br>°C | MIN ULT<br>TRIP | MAX ULT<br>TRIP | TRIP TIME - SECONDS |         |         |
|------------|-----------------|-----------------|---------------------|---------|---------|
|            |                 |                 | 200%                | 500%    | 1000%   |
| +25        | 115%            | 138%            | 4-16                | .4-1.6  | .10-.40 |
| -54        | 115%            | 165%            | 7-35                | .6-3.0  | .15-.70 |
| +121       | 85%             | 145%            | 2-13                | .25-1.0 | .06-.25 |

Vibration\*..... 10 G's minimum, 50 - 500 Hz  
 Mechanical Shock..... 50 G's  
 Acceleration..... 10 G's  
 Weight..... 42 gm max

### Interrupt Current

1-20 amps: 6000 amps at 28 VDC  
 25 amps: 1625 amps at 28 VDC  
 1-15 amps: 2500 amps at 120 VAC, 400 Hz  
 20 amps: 2000 amps at 120 VAC, 400 Hz  
 25 amps: 1800 amps at 120 VAC, 400 Hz

### Endurance

2500 cycles 120 VAC, 400 Hz Inductive  
 5000 cycles 120 VAC, 400 Hz Resistive  
 2500 cycles 30 VDC Inductive  
 5000 cycles 30 VDC Resistive  
 10,000 cycles Mechanical, no load

\* Other vibration levels available. Contact factory for details.

### Performance:

Discrimination (resistance to nuisance trips)  
 Devices manufactured by Sensata have demonstrated success  
 on start up, bus transfer, and shut down for motor, fan,  
 strobe light, and fluorescent light.

Detail performance per test document 76508  
 Phase to Phase and Phase to Ground 400 Hz, 120/205VAC

### Guillotine Arc Test:


Guillotine Arc Current .....Less than 700% RC rms  
 Steady State Load .....None to rated current  
 Maximum Arcing Cycles ....Eight  
 Arcing Time Duration .....Less than 100ms

### Loose Terminal Arc Detection

Steady State Load .....Less than 40% RC rms  
 Tripping Time: .....Less than 2 minutes  
 Vibration Source .....Eccentric motor vibratory table

### Wet Arc Detection

MIL-STD-2223 Method 3005, wire per MIL-W-81381/11

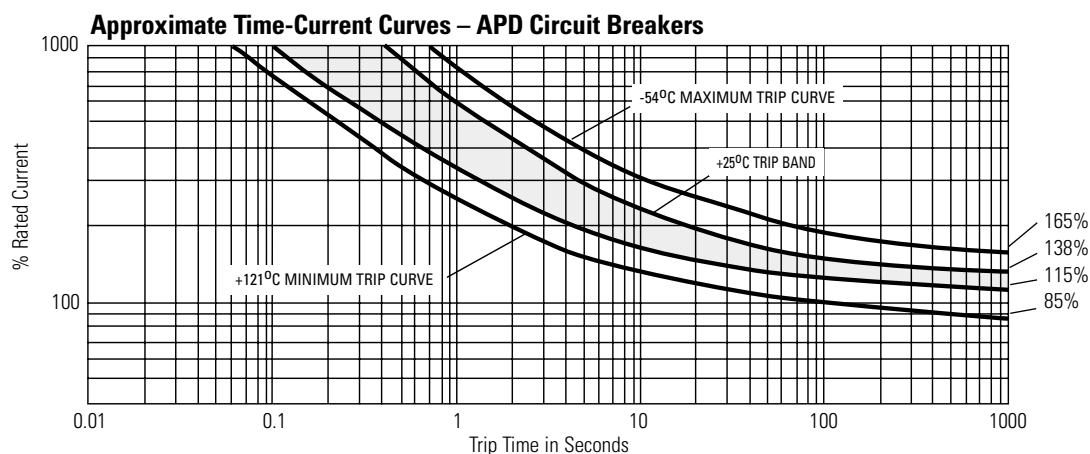

## Cross Reference

QPL approved Aircraft Circuit Breakers specifications have been or are in the process of being converted to SAE industry standard. The specification requirements and part marking remains as per the original military slash sheet. The only difference is the SAE industry designation for the military slash sheet.

| AS Number | Sensata Number | AS Number   | Sensata Number | AS Number | Sensata Number |
|-----------|----------------|-------------|----------------|-----------|----------------|
| AS 33201  | 2TC2           | AS 14154V   | 6TC63          | AS 26574A | 7274-4         |
| AS 33201L | 2TC27          | AS 22073    | 7274-11        | AS 26574L | 7274-70        |
| AS 33201V | 2TC63          | AS 22073V   | 7274-69        | AS 24509A | 7270-1         |
| AS 14105  | 3TC2           | AS 26574    | 7274-2         | AS 24509B | 7270-7         |
| AS 14105L | 3TC27          | AS 25244    | 3TC7           | AS 24510A | 7271-8         |
| AS 14153  | 9TC2           | AS 25244(P) | 3TC8           | AS 24510B | 7271-3         |
| AS 14154  | 6TC2           |             |                |           |                |
| AS 14154L | 6TC37          |             |                |           |                |

### Commercial Aircraft Circuit Breaker Cross Reference

| Boeing Basic Specification | Sensata Style | Airbus Basic Specification | Sensata Style | Lockheed Basic Specification | Sensata Style |
|----------------------------|---------------|----------------------------|---------------|------------------------------|---------------|
| BACC18U                    | 7274-21       | NSA931303                  | 6752-12       | LS10158                      | 2TC20, 3TC20  |
| BACC18W                    | 7276-13       | NSA931304                  | 6752-305      |                              | 2TC26/3TC26   |
| BACC18Z                    | 2TC6          | NSA931320                  | 2TC50         | LS10159S                     | 6TC20, 9TC20  |
| BACC18AA                   | 2TC14         | NSA931321                  | 5TC50         |                              | 6TC26/9TC26   |
| BACC18AC                   | 6TC6          | NSA931322                  | 6TC50         |                              |               |
| BACC18AD                   | 2TC47         | NSA931323                  | 15TC50        |                              |               |
| BACC18AE                   | 9TC6          | NSA931324                  | 2TC64         |                              |               |
| 10-60806-XX                | 6752-304      | NSA931325                  | 6TC64         |                              |               |
| 10-60806-XXXX              | 6752-311      | E0730-005                  | 2TC65         |                              |               |
| <b>Boeing (DPD)</b>        |               | E0731-005                  | 6TC65         |                              |               |
| 5D0001                     | 7274-62       | E0732-005                  | 5TC65         |                              |               |
| None                       | 7274-55       | E0733-005                  | 15TC65        |                              |               |
| None                       | 7276-115      |                            |               |                              |               |

For FAA/PMA part availability go to [www.sensata.com](http://www.sensata.com)

### European Norms

EN2495  
 EN2592  
 EN2794  
 EN2995  
 EN2996  
 EN3661  
 EN3662  
 EN3773  
 EN3774

## Simplified Glossary of Circuit Breaker Terms

---

**Circuit breaker** – A device designed to carry a specific value of current and automatically open a circuit upon overloads or short circuits.

**Thermal circuit breaker** – A circuit breaker that senses a current overload based on thermal heating of the sensing element.

**Time-current curve** – An approximate graph showing the minimum and maximum time a specific breaker will take to trip on various degrees of overload.

**Ambient compensation** – A feature of some thermal breakers that limits or eliminates thermal derating due to ambient temperature.

**Minimum ultimate trip** – Current rating at which a breaker will not trip within a certain period (usually 1 hour) at a specified temperature.

**Maximum ultimate trip** – Current rating at which a breaker must trip within a certain period (usually 1 hour) at a specified temperature.

**Thermal derating** – Tendency of a breaker to trip at lower current levels due to higher ambient temperatures, and to trip at higher levels due to lower ambient temperatures.

**Trip-free** – Feature of certain breakers that makes it impossible to hold the breaker closed against an overload.

**Manual reset** – Method of accomplishing reclosure after circuit interruption has occurred.

**Indicating, non-indicating** – Whether or not breaker gives prominent visual indication of opening, such as exposing a white band around button, or moving toggle to off position.

**Manual trip** – Ability of breaker to be opened manually.

**Auxiliary circuit** – An integrally housed, electrically independent switch linked mechanically to operate with the main circuit breaker contacts.

**Voltage drop** – The voltage decrease across the breaker due to internal resistance of the device.


### WARRANTY

Sensata Technologies warrants its circuit breakers against faulty workmanship or the use of defective materials for a period of 18 months from date of manufacture. This warranty applies only to products purchased directly from Sensata Technologies or through an authorized Sensata Technologies distributor. During the warranty period, any circuit breaker found by Sensata Technologies, in its sole judgement, to be defective, will be repaired or replaced, at the option of Sensata Technologies. Under no circumstances does Sensata Technologies responsibility or liability extend to incidental or consequential damages whatsoever.

The foregoing is in lieu of all warranties express, implied or statutory, including, but not limited to, any implied warranty of merchantability and fitness for a purpose and of any other warranty obligation on the part of Sensata Technologies.

**Important Notice:** Sensata Technologies (Sensata) reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Sensata advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current. Sensata assumes no responsibility for infringement of patents or rights of others based on Sensata applications assistance or product specifications since Sensata does not possess full access concerning the use or application of customers' products. Sensata also assumes no responsibility for customers' product designs.

## Authorized Distributors

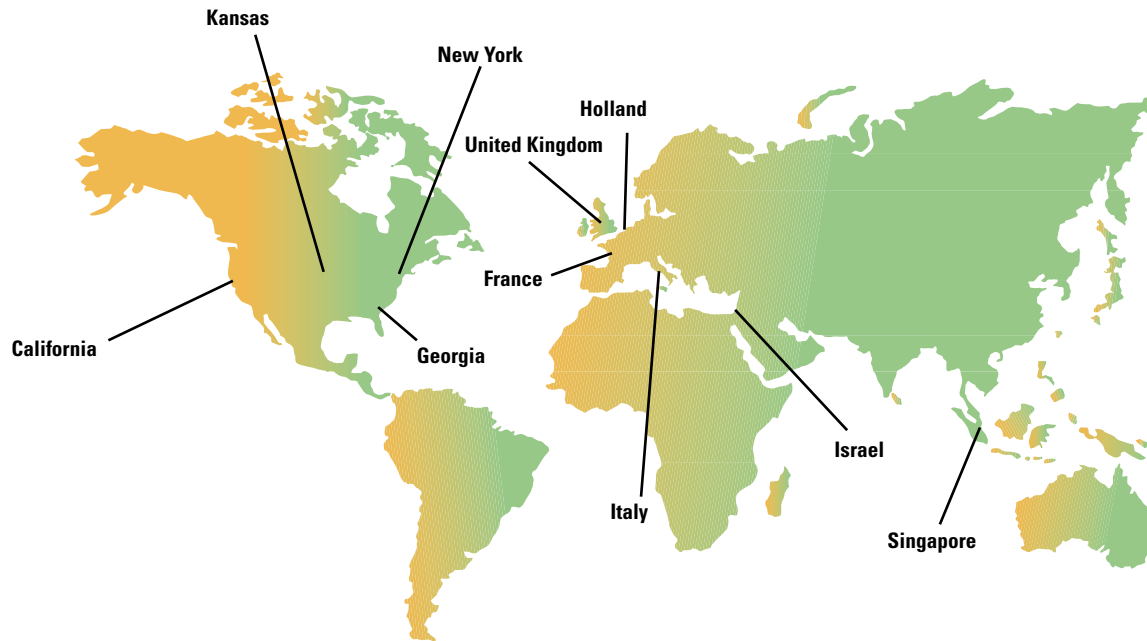

## Authorized U.S. Distributors of All Products

| Name                 | Main Office     | Phone                            | Fax            | Web Site                                                                     |
|----------------------|-----------------|----------------------------------|----------------|------------------------------------------------------------------------------|
| Peerless Electronics | Lynbrook, NY    | (800) 285-2121<br>(516) 593-2121 | (516) 593-2179 | <a href="http://www.peerlesselectronics.com">www.peerlesselectronics.com</a> |
| Flame Enterprises    | Canoga Park, CA | (800) 854-2255<br>(818) 700-2905 | (818) 700-9168 | <a href="http://www.flamecorp.com">www.flamecorp.com</a>                     |
| TPS Aviation         | Hayward, CA     | (510) 475-1010                   | (510) 475-8817 |                                                                              |
| Avio Diepen          | Atlanta, GA     | (770) 996-6430                   | (770) 996-8430 | <a href="http://www.avio-diepen.com">www.avio-diepen.com</a>                 |
| Wesco Aircraft       | Wichita, KS     | (800) 544-4070                   |                | <a href="http://www.airtechnics.com">www.airtechnics.com</a>                 |

## Other Distributors and Sales Agents

| Name                      | Main Office   | Phone               | Fax              | Web Site                                                                     |
|---------------------------|---------------|---------------------|------------------|------------------------------------------------------------------------------|
| JB Controls               | Paris, France | 33 1 56 47 04 04    | 33 1 56 47 04 05 | <a href="mailto:jboher@jbcontrols.com">jboher@jbcontrols.com</a>             |
| Avio Diepen               | Holland       | 31 172 449759       | 31 172 449789    | <a href="mailto:avio-diepen@avio-diepen.com">avio-diepen@avio-diepen.com</a> |
| Charcroft Electronics Ltd | England       | +44 (0) 1591 610408 |                  | <a href="mailto:sales@charcroft.com">sales@charcroft.com</a>                 |
| Odem Electronics          | Israel        | 972 3 966 0340      | 972 3 966 0345   | <a href="http://www.odem.co.il">www.odem.co.il</a>                           |
| Patton Air                | Italy         | 39 331 792 658      | 39 331 796 552   | <a href="mailto:provest@logic.it">provest@logic.it</a>                       |
| Precision Technologies    | Singapore     | 6 65 27 34 573      | 6 65 27 38 898   | <a href="mailto:pretech@singnet.com.sg">pretech@singnet.com.sg</a>           |



[www.sensata.com](http://www.sensata.com)